



**Sturtevant
Richmont**

Torque Application Solutions

Accurate. Reliable. Durable.
Tools You Trust.



**Factory
4.0**

SR Brings Connected
Torque and Angle
Solutions to your factory.

ISO 17025 Accredited

ISO 9001 Registered

Torque Controller System

Global 400 Series

Mixed Model Manufacturing Mandates Flexibility:

We specialize in solving the most complex assembly challenges. The Global 400 is designed to organize work stations where highly customized products are assembled. It can work with 16 primary torque tools, 8 holding tools, and an additional 8 I/O tools. It has the capacity for 100 sets of parameters that can be grouped allowing 4 operators to work as a team. These parameters or groups can be formed into jobs containing a fixed build sequence of up to 35 steps.

Mixed Model Manufacturing Mandates Communication:

The Global 400 communicates with the operators, the tools, and your network in multiple ways. Parameters or jobs can be assigned via the Ethernet or by the operator via a bar code scanner. Tools can be selected or programmed wirelessly, while the controller displays the required work to the operator. As the operator works through their task, the tools and controller provide auditory, tactile, and visual guidance. The tools provide the controller with immediate notification of operator results. The controller stores up to 10,000 results in on-board memory, and automatically updates your production system via multiple protocols. No production interruptions!

Click Here for Video
Human Powered DC Tool



System Capabilities:

- Six inch diagonal, back-lit, color LCD display 2-RJ-45 Ethernet ports allow for chain, or ring network communication.
- USB-A connector for use with bar code scanner, or updating firmware, and saving files.
- RS-232 D-Sub9 Connector for use with serial bar code scanner or serial printer.
- Ten pin I/O connector providing discreet I/O capabilities.
- Five pin connector for the additional I/O capabilities of the optional GIM400.
- Power Supply 100-240 VAC at 50-60 Hz.
- Key switch for programming access. 21-function keys for programming.
- Adjustable and programmable beeper for audio communication.
- Order Part No. 10747 cable for 10 pin I/O

Protocols: EtherNet IP, Open Protocol, ToolsNet,

Software: SR Global Manager (Included) optional SR GlobalHost reporting software (Part No. 10622)

Order Global 400, Part No. 10497

Enhance your controller with our GIM400 Global Input/Output Multiplier, part number 10611.



Multi-Port
Torque Controller System

Global 400mp Series



The mp Takes You To The Next Level:

The Global 400mp distributes all the power, flexibility, ease and capabilities of the Global 400 over four (4) individual network interfaces. The result? Up to four (4) operators can work independently and don't even have to be in the same work cell.

Four separate network interfaces and Global 400mp architecture eliminate the need for groups in order to support simultaneous work.

Parameters are formed directly into jobs. With 4 network interfaces each operator can work on their own job, independent of the other operators.

The Global 400mp can be applied to assembly, repair, and maintenance operations.

The Global 400mp works with up to 16 torque tools, 8 holding tools and 8 I/O tools divided among the 4 network interfaces.



Flexible, multi-tool control including wireless connectivity to our Exacta line of digital wrenches, SLTC-FM wireless torque wrenches, and HT Series holding tools, and wired connectivity with our SLTC hardwired wrenches, and PST-1200 pneumatic sensor transceiver.

System Capabilities:

- Six inch diagonal, back-lit, color LCD display
- 2-RJ-45 Ethernet ports allow for chain, or ring network communication.
- USB-A connector for use with bar code scanner, or updating firmware, and saving files.
- RS-232 D-Sub9 connector for use with serial bar code scanner or serial printer.
- Ten pin I/O connector providing discreet I/O capabilities.
- Five pin connector for the additional I/O capabilities of the optional GIM400.
- Power Supply 100-240 VAC at 50-60 Hz.
- Key switch for programming access. 21-function keys for programming.
- Adjustable and programmable beeper for audio communication.
- Order Part No. 10747 cable for 10 pin I/O

Protocols: EtherNet IP, Open Protocol, ToolsNet,

Software: SR Global Manager (Included) optional SR GlobalHost reporting software (Part No. 10622)

Order Global 400mp, Part No. 10612



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59



Comes with blow molded case.



Exacta 1350 TD

Radio Equipped Digital Torque & Angle Screwdriver

Series

- Compatible with the Global 400 and Global 400mp torque controllers. This is a highly versatile torque driver that will make a big impact in your assemblies. Perfect for lower torque applications when you need accuracy and traceability.
- All torque and angle settings are set using the Global 400 or Global 400mp. Error proofing feature: parameters cannot be set using the buttons on the torque screwdriver.
- XBee radio 2.4 GHz - 12 channels
- Modes of operation: Peak, TAM, T2A, Residual, Prevailing Torque
- Meets/exceeds ASME B107.300-2010 and ISO 6789
- Bi-directional +/- 2% Indicated Value from 5% to 100% of tool capacity.
- The display back light is visible when torque is applied. Displays the torque and angle value on the digital display on the screwdriver.
- Visible from any angle, light band on the driver turns yellow, then green, the driver beeps, and the handle vibrates when target torque is achieved.
- Female and male hexagon versions as well as square drive version gives you flexibility to meet all of your torque driver application needs.
- ESD Compliant when grounding strap is properly worn.
- Powered by 1 AA NiMH battery (two included with driver).
- Compatible with NiMH batteries only.
- Units of measure: in-oz, in-lb, ft-lb, cNm, NM, cmkg
- CE and ROHS compliant



Click here for video

**Small Torque.
Big Impact.**



WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy



TAC FM 2.4 GHz Preset Wireless Click Wrench

TAC

(Torque/Angle Control)



- The speed and access of a click wrench with the accuracy of torque and angle applications. Operator sees OK/NOK LED and the reporting documents date/time stamped attribute data including degree of rotation (angle measurements.)
- Fully compatible traceable torque and angle results with the Global 400, Global 400mp and the all-new TCV-e2.
- Supports simultaneous operation in the Global 400 and TCV-e2 application. Use with Global 400mp for independent tool operation.
- Works with the patented Holding Tool in the Global 400/400mp.
- Torque accuracy of +/- 4% or better of preset value from 20% to 100% of capacity meets or exceeds requirements of ASME B107.300-2010 and ISO 6789. Angle accuracy to within 1°.
- Is equipped with 2 LEDs on the radio case. One LED is Green/Red for OK/NOK. The second LED flashes Blue to indicate tool is selected and turns Blue during use for batch completion.


- Access to well over 200 SR interchangeable heads.
- Audible/tactile pulse when preset torque is achieved.
- Powered by one AAA NiMH rechargeable battery. Shipped with 2 NiMH rechargeable, recyclable batteries. Charger sold separately.
- Error Proofing By Guidance: Provides "OK/NOK" LED on the radio case on the wrench.
 - When P-Set is activated Blue LED indicates selected tool.
 - Differentiating sounds for acceptance tone/reject beep comes from the controller
 - Orange flashing LED: Low battery warning light

A NiMH rechargeable AAA battery is the mandated power supply because they provide a stable power curve until the very end of the charge. We are also focused on environmental friendliness. Using NiMH AAA with the largest mAh rating you can find will extend time between battery changes.

Click here for video



**TAC
Supervideo**

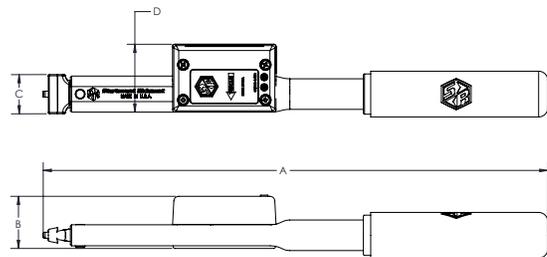

Part No.	Model	Torque Capacity*	Head	A (in.)	B (in.)	C (in.)	D (in.)	Weight (lbs.)
810712	TAC-150I	150 in lb / 17 Nm	Dovetail	7 ³ / ₃₂	1 ²¹ / ₆₄	¹⁵ / ₁₆	1 ⁴⁷ / ₆₄	0.5
810713	TAC-300I	300 in lb / 34 Nm	Dovetail	9 ¹ / ₃₂	1 ²¹ / ₆₄	¹⁵ / ₁₆	1 ⁴⁷ / ₆₄	0.5
810714	TAC-750I	750 in lb / 85 Nm	Dovetail	12 ⁵⁹ / ₆₄	1 ²¹ / ₆₄	1	1 ⁴⁷ / ₆₄	0.5
810715	TAC-1800I	1800 in lb / 204 Nm	Dovetail	16 ⁹ / ₁₆	1 ²¹ / ₆₄	1 ¹ / ₄	1 ⁴⁷ / ₆₄	1.3
810721	TAC-1800I ERGO	1800 in lb / 204 Nm	Dovetail	20 ⁹ / ₁₆	1 ²¹ / ₆₄	1 ¹ / ₄	1 ⁴⁷ / ₆₄	1.3
10711	TAC Connect Software (for 1350 Series Exacta and TAC Torque and Angle Wrench tool calibration)							
10710	SR Connect (radio interface for tool calibration)							
10740	4-Slot Battery Charger							
10741	8-Slot Battery Charger							
21970	AAA NiMH Battery							

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- See safety precautions at sr torque.com



Features distinctive, durable blue powdercoat finish.

Changing Operator Behavior by Behavior Modification

A click wrench is designed to click at a predetermined point. For this application this value is called Click. An operator should stop pulling when the wrench clicks.

This ensures the proper torque application. If operators don't stop pulling when the wrench clicks, the applied torque continues to increase. The question becomes "How much additional torque was applied?"

If you measure Click, the measurement is taken at the point where the wrench clicked. The additional torque remains unmeasured. Until now!

The TAC wrench quickly and easily solves this long-standing challenge.

The TAC wrench tracks the Click and the Peak Torque settings. So it tracks and reports the point at which the wrench clicked. It also tracks and reports the final applied torque result with Peak Torque. In addition the wrench reports the degrees of angle rotation for the fastener.

The Click, the Peak Torque and the degrees of rotation are all displayed on the Global 400/400mp screen and in the reporting. Now a supervisor has actionable data that can be used to train the operator. There is now a trackable basis for error proofing by


Torque and Angle Measurement Terms:

Click: Reads where the wrench clicks


Peak: Reads the highest applied torque value

Torque and Angle Monitoring (TAM): Quickly identifies "double hit" on fasteners. Identifies changing joint conditions for hydraulic connections. Shows both applied torque value and degrees of rotation. Minimum and maximum angle settings are customizable.

guidance (using light, sound, and tactile stimulation) as well as historical data to change behavior, which is error proofing by behavior modification.

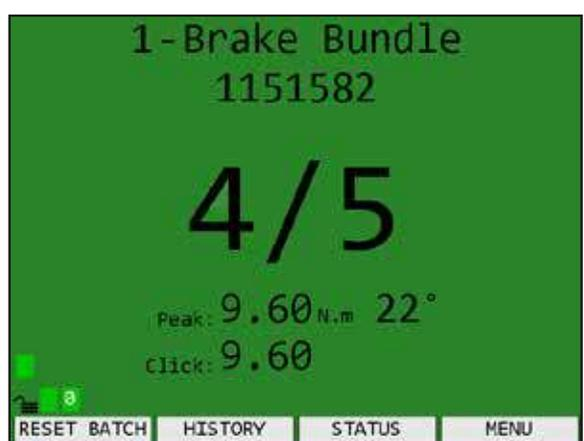

In this application the operator stopped pulling when the wrench clicked. The fastener was not over-torqued, and this correct torque operation is displayed and tracked here.

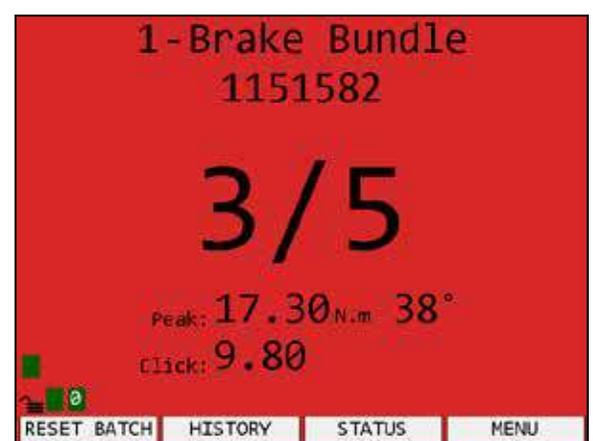

With this fastener the operator continued to pull long after the wrench clicked.

The G400 would consider this to be a reject. Now supervisors have concrete evidence to help improve performance and shape behavior





Interchangeable Head Digital Torque and Angle Wrench

1350 SERIES EXACTA[®] 2

- Compatible with the Global 400 and Global 400mp torque controllers. This is a highly versatile wrench that will make a big impact in your assemblies.
- A slimmer version of our 1250 Series Exacta 2 digital torque and angle wrench. It shares the Shear Beam design transducer.
- Meets/exceeds ASME B107.300-2010 and ISO 6789
- Bi-directional +/- 2% Indicated Value from 20% to 100% of tool capacity.
- All torque and angle settings are set using the Global 400 or Global 400mp. Error proofing feature: parameters cannot be set using the buttons on the wrench.
- The display backlight is visible when torque is applied.
- Visible from any angle, light bands on both sides of the wrench turn yellow, then green, the wrench beeps, and the handle vibrates when target torque is achieved.
- Traditional pin/spring Dovetail or Quick Change Dovetail gives you have access to over 200 interchangeable heads.
- Ships with part number 10679: 2 NiMH rechargeable battery cartridges, adapter and charger
- Torque units: in.lb., ft.lb., Nm, cNm, cmkg
- New, smaller profile with light-weight, rugged design.
- Comes with free Certificate of Compliance from our ISO/IEC 17025 Accredited Laboratory.

Part No.	Model	Torque Capacity	Overall Length	Weight without head	Head Options
10780	1350 Series EXACTA 2-5	60 in lb/6.7 Nm	13.13 in	1.29 lb	200+ Heads
10781	1350 Series EXACTA 2-25	300 in lb/33.9 Nm	14.88 in	1.45 lb	200+ Heads
10782	1350 Series EXACTA 2-75	900 in lb/101.7 Nm	16.5 in	1.60 lb	200+ Heads
10783	1350 Series EXACTA 2-150	1800 in lb/203 Nm	19.75 in	1.86 lb	200+ Heads
10784	1350 Series EXACTA 2-250	3000 in lb/338.9 Nm	27.68 in	2.51 lb	200+ Heads
10786	1350 Series EXACTA 2-5 QC	60 in lb/6.7 Nm	13.13 in	1.29 lb	200+ Heads
10787	1350 Series EXACTA 2-25 QC	300 in lb/33.9 Nm	14.88 in	1.45 lb	200+ Heads
10788	1350 Series EXACTA 2-75 QC	900 in lb/101.7 Nm	16.5 in	1.60 lb	200+ Heads
10789	1350 Series EXACTA 2-150 QC	1800 in lb/203 Nm	19.75 in	1.86 lb	200+ Heads
10790	1350 Series EXACTA 2-250 QC	3000 in lb/338.9 Nm	27.68 in	2.51 lb	200+ Heads
10711	TAC Connect Software (for 1350 Series Exacta and TAC Torque and Angle Wrench tool calibration)				
10710	SR Connect (radio interface for tool calibration)				
10679	Exacta 1350 2 NiMH Rechargeable Battery Packs, Adapter, & Charger Kit				
21992	Exacta 1350 NiMH Rechargeable Battery Pack				
21991	Exacta 1350 Battery Battery Charger Adapter				

Wrenches calibrated for use with heads having 1 7/16" (36.5mm) common centerline. On request wrenches can be calibrated for 3 7/8" (98.4mm) centerline. The 1350 Series Exacta 2 can change the common centerline head length in the software setting and not have to recalibrate the tool. NiMH Batteries rated 800 mAh to 1000 mAh are acceptable. Higher mAh ratings mean more cycles between recharge and longer recharge times. Comes with 2 battery packs, battery charger, and one adapter.



Comes with blow molded case.


Setting/Editing P-Sets with the 1350 and the Global 400

Setting or editing P-Sets in the Global 400 is fast and easy.

More important than convenience, there is a very strong control factor in the process. Setting up a P-Sets can only be done or edited in the controller, or using Global Manager software. This prevents any inadvertent changes to torque values, unit of measure, or batch count.

Fully Customizable P-Sets

To create a P-Set, select a tool, establish the number of fasteners in the batch, select the units of measure and the mode of operation for the tool. You can customize the torque values to ensure that operators are applying the required torque value.



Four Modes of Torque and Angle Operation:

- TAM (torque and angle monitoring – double hit protection and identifies changing joint conditions)
- T2A (torque to angle – for highly engineered assemblies)
- Residual (measures existing torque on previously tightened fasteners)
- Peak (all torque, no angle measurement)

Operator Guidance Using Color, Sound, and Vibration

Operators receive error proofing by guidance from both the 1350 wrench and the controller. By establishing the Min Torque, you are also establishing the point at which the light band on the side of the wrench changes. At 90% of the Min Torque setting the light band changes to yellow. The display will show "OK" when Min Torque is reached but the LEDs will not turn green until the Target Torque (TGT) Torque, the wrench beeps and the handle vibrates. When the operator stops pulling the wrench reads, clears, and signals the controller. The controller display then turns green and the batch count advances.



If the operator continues to pull past the Max Torque, the light bands and the controller display turn red and the reject buzzer sounds on the wrench and the controller.

For more information about how the 1350 Digital Torque and Angle wrench can help your assemblies, contact your local Sturtevant Richmond sales professional.

Need a 400 ft lb or 600 ft lb capacity digital torque wrench? Go to srtorque.com and see the 1250 Series Exacta 2 wrenches.

Click here for video

Why Torque & Angle?



**Ships with part number 10679:
2 NiMH rechargeable battery
cartridges, adapter and charger**

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- See safety precautions at srtorque.com





**Comes with
blow molded
case.**

1250 SERIES EXACTA® 2

Digital Torque & Angle Wrench

- Bi-directional +/- 1% Indicated Value from 20% to 100% of tool capacity.
- Meets/Exceeds the ASME and ISO standards.
- Angle measurements include: Torque To Angle, Torque With Angle Monitoring, Residual Torque, Prevailing Torque Mode.
- Also operates in Peak Mode with no angle measurements
- Included with the 1250 Series wrenches are two single cartridge batteries and charger. One battery can be charging while the other is in use.
- Vibrating handle when the target torque and angle values are reached.
- Programmable wrench display "lighting sequence" works with both torque and angle. Within the engineering specifications, a target can be set to acknowledge target achieved feedback with display color change and handle vibration.
- Up to four tools can operate simultaneously with the Global 400/400mp.
- Robust radio communication speeds support the shortest takt times.
- Operator can complete active P-Set even if radio communication is severed.
- When radio communication resumes, the wrench automatically uploads all missed P-Set data.
- The wrench automatically recalibrates for P-Sets requiring different head lengths.
- Wrenches are available with our traditional fixed ratchet, pin/spring dovetail, optional quick change (QC) dovetail with access to well over 200 interchangeable heads



Compatible Products

Fully compatible with Global 400 and Global 400mp controller where multiple tools with simultaneous uses are needed. The 1250 Series Exacta 2 does not communicate with the Global 8, PTV or TCV.

Why Torque and Angle?

Torque with angle measurement provides a significantly more accurate and repeatable clamp load from one assembly to the next.

Traceability and Digital Data Capture

Provides digital date/time stamped documentation on every fastening achieved with our wireless tools.

Click here for video

**Exacta 1100/1200
/1250 Testing**



**The 1250 Series measures torque in:
cNm, Nm, cmkg, In lb, and ft lb**

Five Operational Modes:

Torque to Angle: T2A

Measures torque first and then degrees of fastener rotation to stretch the fastener a predetermined amount. That closely managed bolt stretch creates greater repeatability than using torque alone.

Torque with Angle Monitoring: TAM

Measures torque while ensuring sufficient rotation. Helps identify “double-tightened” fasteners and changing joint conditions.

Prevailing Torque Mode: PTM

Factors out friction inherent to lock nuts.

Residual: RES

Audit torque value on previously tightened fasteners with greater accuracy.

Peak

Pure torque measurement without angle measurement.

1250 Series Exacta 2 Digital Torque and Angle Wrenches

Part No.	Model Designation	Capacity	Head Style	Lever Length	Overall Length	Weight
10652	1250 Series Exacta 2 - 25	25 ft lb	Dovetail	12.5"/317mm	16.1"/409mm	2.8 lb/1.27 kg
10653	1250 Series Exacta 2 - 75	75 ft lb	Dovetail	15.8"/401mm	19.4"/493mm	3.0 lb/1.36 kg
10654	1250 Series Exacta 2 - 150	150 ft lb	Dovetail	17.8"/452mm	21.5"/546mm	3.1 lb/1.40 kg
10659	1250 Series Exacta 2 - 250	250 ft lb	Dovetail	21.2"/538mm	23.0"/584mm	4.1 lb/1.86 kg
10655	1250 Series Exacta 2 - 250 R	250 ft lb	1/2" SD Ratchet	20.8"/527mm	25.0"/634mm	4.1 lb/1.86 kg
10656*	1250 Series Exacta 2 - 400	400 ft lb	Dovetail	35.9"/912mm	35.2"/895mm	7.7 lb/3.49 kg
10671	1250 Series Exacta 2 - 400 R	400 ft lb	3/4" SD Ratchet	33.7"/856mm	38.3"/973mm	7.7 lb/3.49 kg
10657	1250 Series Exacta 2 - 600 R	600 ft lb	3/4" SD Ratchet	55.1"/1399mm	59.7"/1519mm	13.0 lb/5.90 kg
10666	1250 Series Exacta 2 - 25 QC	25 ft lb	Quick Change	12.5"/317mm	16.1"/409mm	2.8 lb/1.27 kg
10667	1250 Series Exacta 2 - 75 QC	75 ft lb	Quick Change	15.8"/401mm	19.4"/493mm	3.0 lb/1.36 kg
10668	1250 Series Exacta 2 - 150 QC	150 ft lb	Quick Change	17.8"/452mm	21.5"/546mm	3.1 lb/1.40 kg
10669	1250 Series Exacta 2 - 250 QC	250 ft lb	Quick Change	21.0"/533mm	25.2"/640mm	4.1 lb/1.86 kg

Lever Length and Overall Length

The lever length on models up to 250 are based on 1 7/16" or 36.5mm head length.

*Lever length for the 10656 is based on a 3 7/8" or 98.4mm head length.



1250 Series Exacta 2 Digital Torque Wrench Batteries and Chargers

Part No.	Model Designation	Capacity
10674	Kit, Two Battery Packs and One Charger	N/A
10673	Battery Pack Charger, NiMH	Fast charge with built in circuitry protection against over charging.
10672	Battery Pack, NiMH	3.6V, 2.1 Ah

*Use ONLY the Sturtevant Richmont specified NiMH battery cartridge.



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- See safety precautions at srtorque.com





Holding Tool Technology Wrenches

HT

SERIES



Click here for video

Holding Tool Stops Leaks



⚠ WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59

Stop Hydraulic Leaks Before They Start

Engineers with hydraulic assemblies immediately recognize the value this tool brings to their assembly quality.

Simple Solution to a Complex Problem

Applications involving hydraulic hoses, and or, hydraulic connections, require a counter torque reaction tool. When these tools are not used hoses can be twisted and or, connectors can be misaligned, creating rework or increased warranty costs.

The SR solution is to ensure both torque wrench and back up tool are used during the fastening operation.

At the P-Set level, holding (back-up) tools are paired to the primary torque wrench. The back-up tool must be engaged prior to, during, and after the torque tool is used.

No Drips, No Runs, No Errors!

Using thrust force to activate the holding (back-up) wrench is similar to using a screwdriver. This helps focus the operator to hold the hose or the connector in a static position while the torque wrench applies the torque.



Part No.	Model	Weight	Length
810673	HTS 13"	1.9 lbs. / .86 kg	13" / 33.02 cm
810674	HTL 20"	4.9 lbs. / 2.22 kg	20" / 50.8 cm

Comes with blow molded case.



1200 SERIES EXACTA[®] 2

Digital Torque Wrench

The 1200 Series Exacta 2 radio speed is 10x that of the 1100 Series Exacta 2.

The 1200 Series measures torque in: cNm, Nm, cmkg, In lb, and ft lb

The 1200 Series Exacta has all the features and characteristics of the 1250 with these exceptions:

- Uses 4 AA NiMH Rechargeable batteries (Batteries not included)
- Non-vibrating handle
- Torque measurement only

Accuracy, reliability, durability are the same as the 1250 Series Exacta 2.



1200 Series Exacta 2 Digital Torque Wrenches

Part No.	Model	Capacity	Head Type	Lever Length	Overall Length	Weight
10646	1200 Series Exacta 2 - 25	25 ft lb/33.8Nm	Dovetail	12.5"/317mm	16.1"/409mm	2.8 lb/1.27 kg
10647	1200 Series Exacta 2 - 75	75 ft lb/101.5Nm	Dovetail	15.8"/401mm	19.4"/493mm	3.0 lb/1.36 kg
10648	1200 Series Exacta 2 - 150	150 ft lb/203.3Nm	Dovetail	17.8"/452mm	21.5"/546mm	3.1 lb/1.40 kg
10658	1200 Series Exacta 2 - 250	250 ft lb/338.9Nm	Dovetail	21.2"/538mm	23.0"/584mm	4.1 lb/1.86 kg
10649	1200 Series Exacta 2 - 250 R	250 ft lb/338.9Nm	1/2" SD Ratchet	20.8"/527mm	25.0"/634mm	4.1 lb/1.86 kg
10650*	1200 Series Exacta 2 - 400	400 ft lb/542Nm	Dovetail	35.9"/912mm	35.2"/895mm	7.7 lb/3.49 kg
10670	1200 Series Exacta 2 - 400 R	400 ft lb/542Nm	3/4" SD Ratchet	33.7"/856mm	38.3"/973mm	7.7 lb/3.49 kg
10651	1200 Series Exacta 2 - 600 R	600 ft lb/813Nm	3/4" SD Ratchet	55.1"/1399mm	59.7"/1519mm	13.0 lb/5.90 kg
10662	1200 Series Exacta 2 - 25 QC	25 ft lb/33.8Nm	Quick Change	12.5"/317mm	16.1"/409mm	2.8 lb/1.27 kg
10663	1200 Series Exacta 2 - 75 QC	75 ft lb/101.5Nm	Quick Change	15.8"/401mm	19.4"/493mm	3.0 lb/1.36 kg
10664	1200 Series Exacta 2 - 150 QC	150 ft lb/203.3Nm	Quick Change	17.8"/452mm	21.5"/546mm	3.1 lb/1.40 kg
10665	1200 Series Exacta 2 - 250 QC	250 ft lb/338.9Nm	Quick Change	21.0"/533mm	25.2"/640mm	4.1 lb/1.86 kg
10740	4-Slot Battery Charging Unit	4-slot AC powered external battery charging unit				
10741	8-Slot Battery Charging Unit	8-slot AC powered external battery charging unit				
816261	Rechargeable NiMH batteries	4-pack NiMH Rechargeable Batteries				

Lever Length and Overall Length

The lever length on models up to 250 are based on 1 7/16" or 36.5mm head length.

*Lever length for the 10650 is based on a 3 7/8" or 98.4mm head length.

NiMH Batteries rated 1400 mAh to 2400 mAh are acceptable. Higher mAh ratings mean more cycles between recharge and longer recharge times.

Use only NiMH AA rechargeable batteries in the 1200 Series Exacta 2 wrenches. Other batteries will damage the wrench and void the warranty.

We build highly durable tools with sophisticated electronics. We design circuits to be as energy efficient as possible. We are also concerned about the environment.

Our tool and tester circuit boards are designed on the highly consistent 1.2 volt power curve provided by rechargeable NiMH batteries. Other batteries like Alkaline or Lithium batteries provide 1.5 volts in the power curve. The additional voltage will damage the circuit board.



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59



GIM400

Global Input/Output Multiplier

The GIM400 is a very flexible accessory for the Global 400 and Global 400mp. It is virtually a Windows-based PLC that can be configured using the Global Manager Freeware that is included with every controller. It can be configured to provide 24 VDC to power the 16 I/O. By adding an additional 3 GIM400 a total of 64 I/O is possible.

A single GIM 400 can also be configured to connect with a PLC in a binary fashion, providing up to 100 I/O.

A serial bus cable along with all the appropriate Phoenix connectors are provided with the GIM400.

Compatible with the Global 400 (Part No. 10497) and Global 400mp (Part No. 10612).

Order the GIM400 using part number 10611.



GSM400

Global Bar Code Scanner Manager

The GSM400 is a perfect accessory to the Global 400mp. Powered off the USB port (on the side of the Global 400mp) it allows connection for up to four (4) serial barcode scanners. Each scanner can be assigned to a network interface and the GSM keeps the scanner and interface paired.

Compatible with the Global 400mp (Part No. 10612).

Order the GSM400 using part number 10613.



WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59



PST 1200 & PST 2000

Pressure Sensor Transceivers

There are a variety of pneumatic torque controlled tools that accommodate high speed assembly. The very nature of high speed assembly creates opportunities for errors. Operators moving too fast can miss tightening some fasteners, attempt to tighten previously tightened fasteners, cross-thread, or release the trigger before final torque is achieved.

The PST, in conjunction with the Global controller can:

- Batch count to ensure all fasteners achieved target torque
- Identify previously tightened fasteners that are attempted again
- Be set to identify cross threaded fasteners at installation
- Identify premature "clutch out" when the operator releases the tool trigger or lever prior to target torque

The PST Series works with most trigger or lever activated, ported torque sensing power tools. Whether a continuous drive, or shut-off pulse tool, the PST monitors air pressure in the motor compartment while applying timers to the various stages of the "run down." This algorithm is created during the auto-cal process and is used to validate or reject all fastenings performed by that tool.

The PST Pressure Sensor Transceivers will provide a more robust assembly process from your pneumatic tools.


For more information contact the factory worldwide: +1.847.455.8677 (between 0730 and 1600 CST) or go to www.srtorque.com/error-proofing-tools/pst-series-pneumatic-transceiver-sensors/



PST 1200



PST 2000

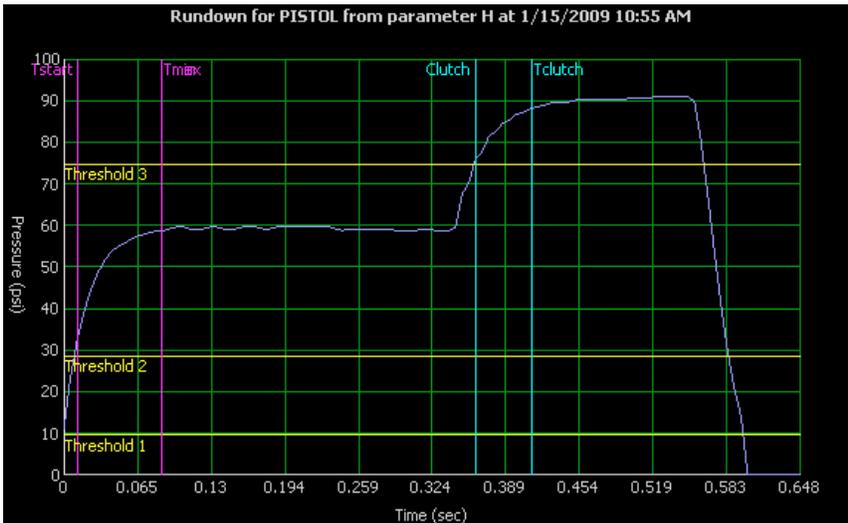

Part No.	Model	Description
10514	PST 1200 BATT	PST 1200 Pressure Sensor Transceiver Battery Power
10515	PST 1200 Hardwired	PST 1200 Pressure Sensor Transceiver Hardwired
10499	PST 2000 BATT	PST 2000 Pressure Sensor Transceiver Battery Power
10498	PST 2000 Hardwired	PST 2000 Pressure Sensor Transceiver Hardwired
21689	PST Power Extension Cable (10 meters)	

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59

Two Controllers in One!

TCV e²

Programmable Torque Verifier Ethernet

In 1999 we helped build the wireless error proofing industry on the back of the I/O driven TCV Controller. It was one box and one tool. Driven by a PLC, the TCV was great for controlling a process and verifying that the work was done.

The TCV was fast and it was simple. It worked with a click wrench and there was no reporting. For many applications that was the perfect approach.

Fast-forward twenty years and we are expanding the TCV by introducing the TCV e2. (TCV Ethernet 2) The Ethernet connection gives you an MES connection capability. The level of sophistication is exponentially expanded.

The TCV e2 doesn't sacrifice a bit of the speed by working with our new TAC, the Digital Torque and Angle click wrench. It also works with our SLTC FM 2.4 GHz click wrench. All the production speed is retained. And two operators can work simultaneously.

Key TCV e2 Features:

- Two independent channels so two operators work independently.
- Functions with the new TAC digital torque and angle click wrench as well as the legendary SLTC FM 2.4 GHz click wrench.
- I/O, network, or bar code driven
- Functions with 2 bar code readers
- Comes with a full version of ACOP, PCFS
- Ethernet IP capable



Using the new digital torque and angle wrench, the TCV e2 captures the date and time stamped, exact torque and angle values for each fastening. You get all the data you want without sacrificing one millisecond of takt time. Reporting tells you where the wrench clicked and where the operator stopped pulling. This is actionable data that you can use for training.

If you have an indexing line, and torque control matters, you need the TCV e2 and the radio equipped tools.

Order the TCV-e2 FM 2.4 GHz using part number 10676.



- Learn in up to 10 tools
- Comes with 2 separate 24 VDC I/O ports. Why pay extra for this?
- Complete interface with SR Global Manager software for setting parameters, etc.
- Reports into Global Host or ToolsNet.

To learn more about how the TCV e2 can error proof your assembly processes, go to srtorque.com or contact your local Sturtevant Richmond sales professional.



Click here for video

**TCV e2
Introduction**

TAC Connect & SR Connect

Software and Radio Interface

TAC CONNECT is a software program used to check and calibrate The TAC wrench as well as the 1350 Series Exacta 2 digital torque and angle wrench. The SR CONNECT wireless radio dongle is the radio used to communicate with the tool and the computer during the calibration process. When you purchase TAC CONNECT, you get an SR Connect module to go with the software.

There is no other way to access the functionality required to test and calibrate the TAC wrench or the 1350 Series Exacta 2. If you intend to calibrate these tools we are happy to share the procedure with you. You will need both the TAC CONNECT

software and SR CONNECT

The TAC CONNECT application wirelessly communicates with the TAC digital click wrench through SR Connect, which is a wireless XBee dongle. The combination of TAC CONNECT and SR CONNECT provide the user a means to check the accuracy of the tool when compared to a torque tester reading and calibrate the tool if necessary.

Order part no. 10711 TAC CONNECT Package which includes part no. 10710 SR CONNECT Radio Interface

TAC CONNECT SCREEN LAYOUT


The main screen will provide connection options similar to the DTC CONNECT application along with the Check Tool and Calibrate Tool options. There are a series of screens that allow you to complete all the required testing and calibration functions.

In addition to testing and calibration, this combination of software and hardware allows you to preset the TAC wrench at a specific torque value along with the units of measure.

A video series on using the TAC CONNECT and SR CONNECT dongle are available. We also have a video on the calibration procedure for both the TAC Wrench and the 1350 Series Exacta 2 digital torque and angle wrench.

For more information about the TAC CONNECT and SR CONNECT dongle, contact your local Sturtevant Richmond wireless sales professional.

Please note, only authorized Sturtevant Richmond wireless distributors carry this product. Be sure to buy only from authorized Sturtevant Richmond wireless distributors.

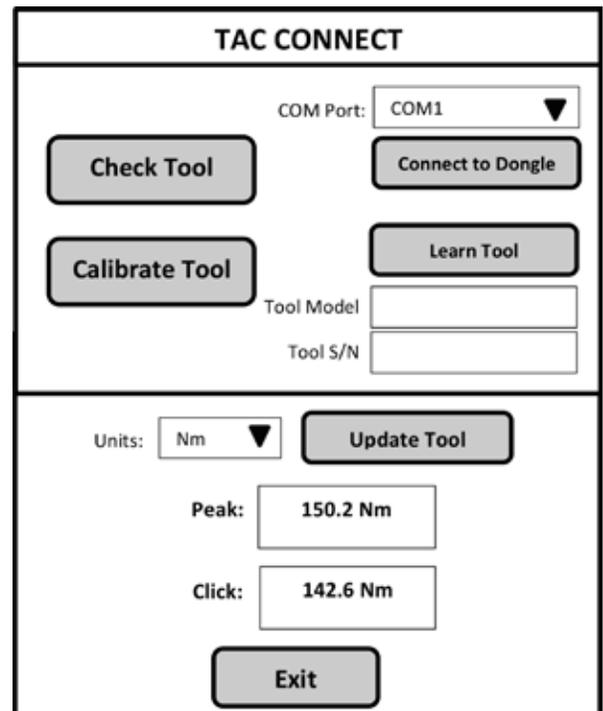



TCV-FM 2.4 GHz

Torque Control Verifier

I/O driven, the TCV is ideal where accuracy and repeatability are needed. Batch count can be performed by PLC.

- New Feature! Two SLTC FM-2.4 GHz wrenches can be used simultaneously with the TCV. Double your production or throughput.
- Immediately informs operator via lights and a buzzer of proper ("Accept") or improper ("Reject") wrench use
- 5 pin connector for use with 24 VDC I/O system
- Device Programmer software is included with each TCV and allows the ability to assign the purpose of the outputs

- Easily program tool use specifications through the USB port with supplied software
- Operates on either 110-120 VAC or 220-240 VAC power
- See page: 15 for SLTC FM 2.4 GHz wrench information.

Order the TCV-FM 2.4 GHz using part number 10467.



PTV-FM 2.4 GHz

Programmable Torque Verifier

The PTV is our oldest and most popular controller. The PTV is capable of managing 4 parameter sets. Each parameter is paired with a specific wrench. If the operator selects the wrong wrench, communication is ignored until the correct wrench is used.

This is the first, and principle hall mark of all SR tool controllers. The right tool, at the right time ensures accuracy of the assembly operation.

- Immediately informs operator via lights and a buzzer of proper ("Accept") or improper ("Reject") wrench use
- Notifies operator and line when batch is complete
- Allows up to 255 fasteners per batch. Counts fasteners in batch in either direction: up or down

- Cycle accept, cycle reject, batch complete, and reset relays for use with line control system
- Simple and straightforward front panel programming with key lock security control.
- Control tool use sequencing through the unit or via 24 VDC control system
- Operates on either 110-120 VAC or 220-240 VAC power
- See page 15 for SLTC FM 2.4 GHz wrench capacities and part numbers.

Order the PTV-FM 2.4 GHz using part number 10466.



WARNING

- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59



SLTC-FM

Series

SLTC FM 2.4 GHz Preset
Wireless Click Wrench



- Full compatibility with all Global 8, Global 400 and Global 400mp, TCV, TCV-Ethernet, and PTV.
- Accuracy of +/- 4% or better of preset value from 20% to 100% of capacity meets or exceeds requirements of ASME B107.300-2010 and ISO 6789.
- Access to well over 200 SR interchangeable heads.
- Excellent audible/tactile impulse when preset torque is achieved.
- Error Proofing By Guidance: Monitors time in the “clicked” position to provide “OK/NOK” quality attribute data with every use of the tool.

- o Too little time in the clicked position means the tool was likely “jerked”, resulting in over-torque.
- o Correct time in the clicked position means the tool was used properly to transmit the preset torque correctly to the fastener.
- o Too much time in the clicked position means the tool was likely pulled past the click and excess torque was applied to the fastener.

Tool power supply is a AAA battery. An Alkaline battery is supplied with the tool. We recommend NiMH rechargeable batteries for high cycle operations and environmental friendliness.


Previous models were powered by a 6 volt Alkaline battery. Those tools can be upgraded with the current AAA power supply and radio kit.

To order your AAA upgrade kit use part number Part No. 10615 for all models up to and including the 1800 I ERGO model. For wrenches 3000 I and larger use Part No. 10616.

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59

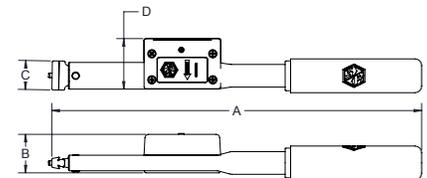

Part No.	Model	Torque Capacity*	Head	A (in.)	B (in.)	C (in.)	D (in.)	Weight (lbs.)
810411	SLTC FM2.4 50 I	50 in lb / 6 Nm	Dovetail	6 15/16	1 39/64	15/16	1 47/64	0.5
810412	SLTC FM2.4 150 I	150 in lb / 17 Nm	Dovetail	6 15/16	1 21/64	15/16	1 47/64	0.5
810413	SLTC FM2.4 300 I	300 in lb / 34 Nm	Dovetail	8 59/64	1 21/64	15/16	1 47/64	0.5
810410	SLTC FM2.4 300 I OHT	300 in lb / 34 Nm	Dovetail	7 1/8	1 21/64	15/16	1 47/64	0.5
810414	SLTC FM2.4 750 I	750 in lb / 85 Nm	Dovetail	12 3/4	1 21/64	1	1 47/64	0.5
810415	SLTC FM2.4 1800 I	1800 in lb / 204 Nm	Dovetail	16 9/16	1 21/64	1 1/4	1 47/64	1.3
810421	SLTC FM2.4 1800 I ERGO	1800 in lb / 204 Nm	Dovetail	20 9/16	1 21/64	1 1/4	1 47/64	1.3
810420	SLTC FM2.4 3000 I	3000 in lb / 339 Nm	Dovetail	20 51/64	1 51/64	1 1/2	1 49/64	4.9
810417	SLTC FM2.4 3600 I	3600 in lb / 408 Nm	Dovetail	24 11/32	2 3/4	2 9/32	2 9/32	5.5
810418	SLTC FM2.4 4800 I	4800 in lb / 542 Nm	Dovetail	34 11/32	2 9/32	2	2 11/16	8.3
810423	SLTCR FM2.4 750 I	750 in lb / 84.73 Nm	3/8" SD Ratchet	14 23/64	1 21/64	1 3/8	1 47/64	1.3
810424	SLTCR FM2.4 1800 I	1800 in lb / 203.73 Nm	1/2" SD Ratchet	18 21/64	1 21/64	1 51/64	1 47/64	1.8
810425	SLTCR FM2.4 1800 I ERGO	1800 in lb / 203.73 Nm	1/2" SD Ratchet	22 45/64	1 21/64	1 51/64	1 47/64	1.8
810416	SLTCR FM2.4 3000 I	3000 in lb / 339 Nm	1/2" SD Ratchet	44 41/64	2 1/2	1 51/64	2 11/64	1.8
810419	SLTCR FM2.4 7200 I	7200 in lb / 813 Nm	3/4" SD Ratchet	37 3/8	2 11/16	2 11/16	2 9/32	10.0



SLTC Hardwired Series




Our Hardwired Preset Clicker-Type Torque Wrenches are based on our industry favorite LTC/LTCR/LTCS line of preset torque wrenches. The SLTC Hardwired wrenches can be connected to a PLC or DC Controller.

- Accuracy of +/- 4% of preset value from 20% to 100% of capacity.
- Meets or exceeds requirements of ASME B107.300-2010 and ISO 6789.
- Five of seven models use the incredibly strong SR dovetail and can be used with any of over 100 SR Interchangeable Heads.
- Tamper-resistant torque setting mechanism design facilitates setting and discourages unauthorized torque setting changes.
- Excellent audible and tactile impulse when preset torque is achieved.

- Light weight and cushion grip provide excellent ergonomics.
- Slender body facilitates use in constrained-access applications.
- Microswitch closes when tool clicks and opens immediately when pressure is released.
- Separate cable with connector (required) facilitates replacement if damaged.
- Rated at 60 VAC/75 VDC at 3 Amperes maximum

Over 200 interchangeable heads to choose from without changing torque values. Simply slide the heads on and “lock on quality”.

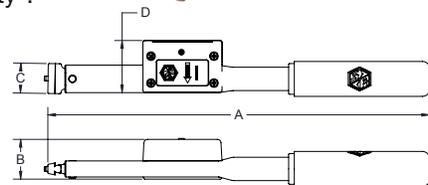

Part No.	Model	Torque Capacity	Head	A (in.)	B (in.)	C (in.)	D (in.)	Weight (lbs.)
810854	SLTC 150 I	30 in. lb.-150 in. lb. / 3.4 Nm-17 Nm	Dovetail	6 ¹⁵ / ₁₆	3/4	17/32	15/16	0.5
810855	SLTC 300 I	60 in. lb.-300 in. lb. / 6.8 Nm-34 Nm	Dovetail	8 ⁵⁹ / ₆₄	3/4	17/32	15/16	0.5
810856	SLTC 750 I	150 in. lb.-750 in. lb. / 17.0 Nm-85 Nm	Dovetail	12 ⁵⁵ / ₆₄	1	17/32	1 7/8	0.5
810857	SLTC 1800 I	360 in. lb.-1800 in. lb. / 40.8 Nm-204 Nm	Dovetail	16 11/64	1 1/4	17/32	1 7/8	1.3
810858	SLTC 3600 I	720 in. lb.-3600 in. lb. / 50.6 Nm-408 Nm	Dovetail	24 ²¹ / ₆₄	1 3/4	49/64	2	5.5
810859	SLTCS 7200 I	1440 in. lb.-7200 in. lb. / 162.6-813 Nm	3/4" SD	35 3/32	1 1/2	1 29/64	2	7
810860	SLTCR 7200 I	1440 in. lb.-7200 in. lb. / 162.6-813 Nm	3/4" SD Ratchet	37 3/8	2 1/16	1 59/64	2	8
10440	Cable for SLTC	Cable with plug, Switch Wrench, SLTC 150I only, coiled 12' extended						
10421	Cable for SLTC	Cable with plug, Switch Wrench, all SLTC/SLTCS/SLTCR models except 150I, coiled 12' extended						
10442	Cable	For SLTC 150 I Wrench: Right Angle Cable, Switch Wrench to bare end, coiled 12' extended						
10423	Cable	Cable, Switch Wrench to bare end, all SLTC/SLTCS/SLTCR except 150I, coiled 12' extended						
10510	Cable	Straight Cable, no coil, Switch Wrench to bare end. 12' in length.						

Cables are sold separately so you can get the configuration you need for your operation.



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59



SDRF **NEW!**

Fine-tooth Ratchet Interchangeable Head

Features and Characteristics

- 4.5 degrees of swing arc required to engage the next tooth
- Smooth operation
- Highly Durable
- Easy to rebuild with our Fine-tooth ratchet renewal kit
- Black Oxide exterior
- Sealed compartment to protect the gear from debris
- Reverse Lever on Back of Ratchet




Available in 1/4"
and 3/8" Drive sizes



The SDRF Interchangeable Head joins over 200 interchangeable heads and over 80 compatible tools in the Sturtevant Richmond lineup, offering you the strength, reliability, and accuracy you demand.

SDRF Series Fine Tooth Ratchet Interchangeable Heads			
Part No.	Model	Torque Capacity	Retention Type
819340	SDRF 3/8	960 in lb	Ball
819341	SDRF 1/4	250 in lb	Ball

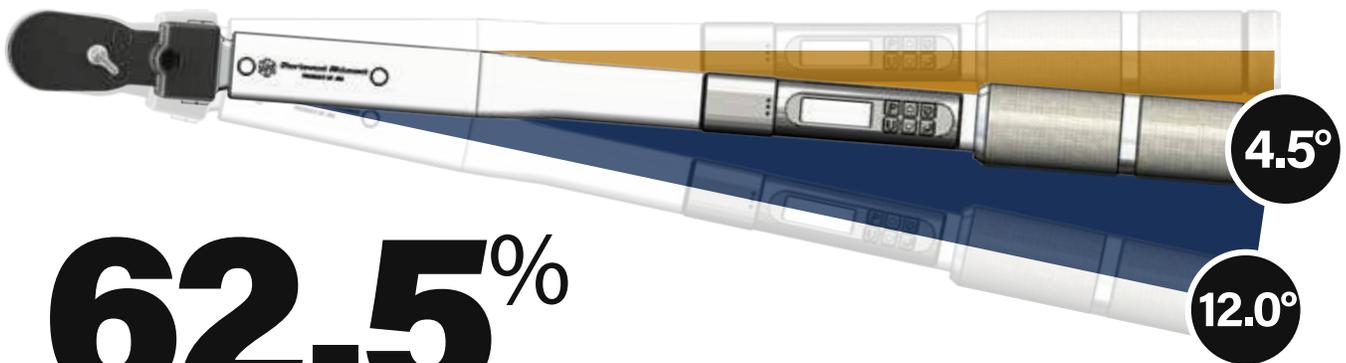

62.5%

Shorter Swing Length

vs. coarse 30-tooth ratchet



Both sizes feature a sealed compartment with reverse lever on back

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- See safety precautions at srtorque.com





SMALL SQUARE DRIVE RATCHET (SDRT)

1 1/16" Common Centerline / 36.5 mm Common Centerline


Part No.	Model	Drive Size	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	Max Torque (in. lbs.)
809504	SDRT - 1/4	1/4"	1 7/8	1 3/8	15/16	3/4	5/8	250
809505	SDRT - 3/8	3/8"	2	1 1/2	1 1/4	1	9/16	1250
809506	SDRT - 1/2	1/2"	2 1/2	1 3/4	1 1/4	1 1/4	3/4	2500
809507*	SDRT - 3/4	3/4"	5 7/64	2 11/16	1 63/64	1 1/2	1	4800

*3/8" Common Centerline / 98.4mm Common Centerline

SMALL RATCHET BODY WITH LARGER DRIVE SIZE

1 1/16" Common Centerline / 36.5 mm Common Centerline

Part No.	Model	Drive Size	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	Max Torque (in. lbs.)
853752	SDRT 1/4 with 3/8 Square Drive	3/8"	1 7/8	1 3/8	15/16	3/4	5/8	250
853395	SDRT 3/8 with 1/2 Square Drive	1/2"	2	1 1/2	1 1/4	1	9/16	1250
809508	SDRT 1/2 with 3/4 Square Drive	3/4"	2 1/2	1 3/4	1 1/4	1 1/4	3/4	2500



SOCKET LOCK PIN

1 1/16" Common Centerline / 36.5 mm Common Centerline

Part No.	Model	Drive Size	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	Max Torque (in. lbs.)
853304	SDRT 1/4 SOC LOCK PIN	1/4"	1 7/8	1 3/8	15/16	3/4	5/8	250
853305	SDRT 3/8 SOC LOCK PIN	3/8"	2	1 1/2	1 1/4	1	9/16	1250
853548	SDRT 1/2 SOC LOCK PIN	1/2"	2 1/2	1 3/4	1 1/4	1 1/4	3/4	2500



HOLD & DRIVE SQUARE DRIVE RATCHET (SDRT)

1 1/16" Common Centerline / 36.5 mm Common Centerline

Part No.	Model	Drive Size	Hole Size (in.)	Hex Key Size (in.)	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	Max Torque (in. lbs.)
853619	SDRT-1/4 with 1/8 hole	1/4"	1/8	3/32	1 7/8	1 3/8	15/16	3/4	5/8	250
853590	SDRT-1/4 with 9/64 hole	1/4"	9/64	1/8	1 7/8	1 3/8	15/16	3/4	5/8	250
853656	SDRT-3/8 with 1/8 hole	3/8"	1/8	3/32	2	1 1/2	1 1/4	1	9/16	1250
853246	SDRT-3/8 with 5/32 hole	3/8"	5/32	1/8	2	1 1/2	1 1/4	1	9/16	1250
853364	SDRT- 1/2 with 5/32	1/2"	5/32	1/8	2 1/2	1 3/4	1 1/4	1 1/4	3/4	2500



RATCHET RENEWAL KITS

for all ratchet equipped torque wrenches and SDRT heads

Part No.	Description
816998	1/4" Ratchet Renewal Kit for ratchet 809504
816958	3/8" Ratchet Renewal Kit for ratchet 809505
816956	1/2" Ratchet Renewal Kit for ratchet 809506
816999	3/4" Ratchet Renewal Kit for ratchet 809507
816959	3/8" Spindle with 1/2" Drive Ratchet Renewal Kit for ratchet 853395
816957	1/2" Spindle with 3/4" Drive Ratchet Renewal Kit for ratchet 809508

WARNING




- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59





OPEN END (OE)

1 1/8" Common Centerline / 36.5 mm Common Centerline



Part No.	Model	Size	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	Max Torque (in. lbs.)
819000	OE - 1/4	1/4	1 5/8	3/4	1/4	3/4	1 1/16	100
819001	OE - 5/16	5/16	1 5/8	3/4	1/4	3/4	1 1/16	150
819002	OE - 3/8	3/4	1 13/16	1 1/16	5/16	3/4	1 1/16	200
819003	OE - 7/16	7/16	1 13/16	1 1/16	5/16	3/4	1 1/16	300
819004	OE - 1/2	1/2	1 15/16	1 5/16	13/32	3/4	1 1/16	350
819005	OE - 9/16	9/16	1 15/16	1 5/16	13/32	3/4	1 1/16	400
819006	OE - 5/8	5/8	1 15/16	1 19/32	7/16	7/8	1 1/16	600
819007	OE - 11/16	1 1/16	1 15/16	1 19/32	7/16	7/8	1 1/16	800
819008	OE - 3/4	3/4	2	1 27/32	1/2	1	1 3/16	1000
819009	OE - 13/16	13/16	2	1 27/32	1/2	1	1 3/16	1250
819010	OE - 7/8	7/8	2	2 1/8	1/2	1 1/4	1 3/16	1500
819011	OE - 15/16	15/16	2	2 1/8	1/2	1 1/4	1 3/16	1750
819012	OE - 1	1	2 3/8	2 5/16	1/2	1 1/4	1 3/16	2000
819013	OE - 1 1/16	1 1/16	2 3/8	2 5/16	1/2	1 1/4	1 3/16	2250
819014	OE - 1 1/8	1 1/8	2 5/16	2 3/4	1/2	1 1/4	1 3/16	2500
819015	OE - 1 3/16	1 3/16	2 5/16	2 3/4	1/2	1 1/4	1 3/16	2750
819016	OE - 1 1/4	1 1/4	2 5/16	2 3/4	1/2	1 1/4	1 3/16	3000

OPEN END (OE)

3 3/8" Common Centerline / 98.4mm Common Centerline

Part No.	Model	Size	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	Max Torque (in. lbs.)
819724	OE-1 5/16	1 5/16	4 5/8	2 15/16	5/8	1 1/2	1	4800
819725	OE-1 3/8	1 3/8	4 39/64	2 15/16	5/8	1 1/2	1	4800
819726	OE-1 7/16	1 7/16	4 39/64	2 15/16	5/8	1 1/2	1	4800
819727	OE-1 1/2	1 1/2	4 19/32	2 15/16	5/8	1 1/2	1	4800
819728	OE-1 9/16	1 9/16	4 37/64	2 15/16	5/8	1 1/2	1	4800
819729	OE-1 5/8	1 5/8	4 9/16	2 15/16	5/8	1 1/2	1	4800
819730	OE-1 11/16	1 11/16	4 9/16	2 15/16	5/8	1 1/2	1	4800
819731	OE-1 3/4	1 3/4	4 35/64	2 15/16	5/8	1 1/2	1	4800
819732	OE-1 13/16	1 13/16	4 35/64	2 15/16	5/8	1 1/2	1	4800
819733	OE-1 7/8	1 7/8	4 15/16	4 11/32	5/8	1 1/2	1	4800
819734	OE-1 15/16	1 15/16	4 93/100	4 11/32	5/8	1 1/2	1	4800
819735	OE-2	2"	4 59/64	4 11/32	5/8	1 1/2	1	4800
819736	OE-2 1/16	2 1/16	4 29/32	4 11/32	5/8	1 1/2	1	4800
819737	OE-2 1/8	2 1/8	4 29/32	4 11/32	5/8	1 1/2	1	4800
819738	OE-2 3/16	2 3/16	4 9/10	4 11/32	5/8	1 1/2	1	4800
819739	OE-2 1/4	2 1/4	4 7/8	4 11/32	5/8	1 1/2	1	4800
819740	OE-2 5/16	2 5/16	4 4/5	4 11/32	5/8	1 1/2	1	4800
819741	OE-2 3/8	2 3/8	4 55/64	4 11/32	5/8	1 1/2	1	4800
819742	OE-2 7/16	2 7/16	4 27/32	4 11/32	5/8	1 1/2	1	4800
819743	OE-2 1/2	2 1/2	4 53/64	4 11/32	5/8	1 1/2	1	4800
819744	OE-2 9/16	2 9/16	4 19/16	4 11/32	5/8	1 1/2	1	4800
819745	OE-2 5/8	2 5/8	4 51/64	4 11/32	5/8	1 1/2	1	4800
819746	OE-2 11/16	2 11/16	5 31/64	5 5/8	5/8	1 1/2	1	4800
819747	OE-2 3/4	2 3/4	5 31/64	5 5/8	5/8	1 1/2	1	4800
819748	OE-2 13/16	2 13/16	5 31/64	5 5/8	5/8	1 1/2	1	4800
819749	OE-2 7/8	2 7/8	5 31/64	6	5/8	1 1/2	1	4800
819750	OE-2 15/16	2 15/16	5 31/64	6	5/8	1 1/2	1	4800
819751	OE-3	3	5 31/64	6	5/8	1 1/2	1	4800
819752	OE-3 1/4	3 1/4	5 9/32	6	5/8	1 1/2	1	4800

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59






OPEN END (OE)

7/16" Common Centerline / 36.5mm Common Centerline

Part No.	Model	Size (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Torque Rating (Nm)
809294	OE-5 mm	5	43.18	20.32	7.62	20.32	17.78	8
809290	OE-6 mm	6	43.18	20.32	7.62	20.32	17.78	9
809291	OE-7 mm	7	43.18	20.32	7.62	20.32	17.78	11
809292	OE-8 mm	8	43.18	20.32	7.62	20.32	17.78	16
809293	OE-9 mm	9	45.72	27.94	7.62	20.32	17.78	22
819943	OE-10 mm	10	45.72	27.94	7.62	20.32	17.78	22
819944	OE-11 mm	11	45.72	27.94	7.62	20.32	17.78	34
809226	OE-12 mm	12	48.26	33.02	10.16	20.32	17.78	39
819945	OE-13 mm	13	48.26	33.02	10.16	20.32	17.78	39
819946	OE-14 mm	14	48.26	33.02	10.16	20.32	17.78	45
809227	OE-15 mm	15	48.26	40.64	10.16	22.86	17.78	67
819947	OE-16 mm	16	48.26	40.64	10.16	22.86	17.78	67
819948	OE-17 mm	17	48.26	40.64	10.16	22.86	17.78	79
809228	OE-18 mm	18	48.26	40.64	10.16	22.86	17.78	90
819949	OE-19 mm	19	50.8	45.72	12.70	25.40	17.78	113
819950	OE-21 mm	21	50.8	45.72	12.70	25.40	20.32	140
819951	OE-22 mm	22	50.8	53.34	12.70	33.02	20.32	169
819952	OE-24 mm	24	50.8	53.34	12.70	33.02	20.32	197
809229	OE-27 mm	27	55.88	58.42	12.70	33.02	20.32	254
819956	OE-30 mm	30	58.42	71.12	12.70	33.02	20.32	310
819958	OE-32 mm	32	58.42	71.12	12.70	33.02	20.32	338



OPEN END (OE)

3/8" Common Centerline / 98.4mm Common Centerline

Part No.	Model	Size (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Torque Rating (Nm)
819761	OE-33 mm	33	117.48	74.61	15.88	38.1	25.4	350
819762	OE-34 mm	34	117.48	74.61	15.88	38.1	25.4	350
819763	OE-35 mm	35	117.08	74.61	15.88	38.1	25.4	350
819766	OE-36 mm	36	117.08	74.61	15.88	38.1	25.4	350
819764	OE-37 mm	37	116.68	74.61	15.88	38.1	25.4	400
819765	OE-38 mm	38	116.68	74.61	15.88	38.1	25.4	400
819771	OE-40 mm	40	116.28	74.61	15.88	38.1	25.4	400
819755	OE-41 mm	41	116.28	74.61	15.88	38.1	25.4	400
819769	OE-42 mm	42	115.89	74.61	15.88	38.1	25.4	400
819774	OE-44 mm	44	125.41	110.33	15.88	38.1	25.4	400
853545	OE-46 mm	46	125.41	110.33	15.88	38.1	25.4	400
819770	OE-48 mm	48	124.62	110.33	15.88	38.1	25.4	400
819756	OE-50 mm	50	125.02	110.33	15.88	38.1	25.4	400
819757	OE-55 mm	55	124.22	110.33	15.88	38.1	25.4	400
819753	OE-60 mm	60	123.43	110.33	15.88	38.1	25.4	400

Custom Solutions

In addition to our established line of interchangeable heads, SR is proud to offer custom solutions to meet your unique torque needs. For more information on custom interchangeable heads and other solutions please contact SR customer service world wide at +1 847-455-8677

WARNING




- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59



RATCHETING OPEN END (ROE)


1 1/16" Common Centerline / 36.5 mm Common Centerline

Slight disengagement from the fastener allows operator to rapidly rotate wrench.



Part No.	Model	Hex Size (in.)	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	Max Torque (in. lbs.)
819201	ROE - 5/16	5/16	1 1/64	3/4	1/4	3/4	1 1/16	90
819202	ROE - 3/8	3/8	1 5/8	1 1/16	5/16	3/4	1 1/16	120
819203	ROE - 7/16	7/16	1 23/32	1 1/16	5/16	3/4	1 1/16	180
819204	ROE - 1/2	1/2	1 23/32	1 5/16	13/32	3/4	1 1/16	210
819205	ROE - 9/16	9/16	1 27/32	1 5/16	13/32	3/4	1 1/16	240
819206	ROE - 5/8	5/8	1 27/32	1 19/32	7/16	3/4	1 1/16	360
819207	ROE - 11/16	1 1/16	1 7/8	1 19/32	7/16	3/4	1 1/16	480
819208	ROE - 3/4	3/4	2	1 27/32	1/2	1	1 3/16	600
819209	ROE - 13/16	13/16	1 31/32	1 27/32	1/2	1	1 3/16	750
819210	ROE - 7/8	7/8	1 31/32	2 1/8	1/2	1 1/4	1 13/16	900
819211	ROE - 15/16	15/16	1 61/64	2 1/8	13/32	1 3/16	1 1/4	1050
819214	ROE - 1 1/8	1 1/8	2 19/64	2 1/4	1/2	1 1/4	1 1/4	1500

Part No.	Model	Hex Size (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Max Torque (Nm)
819220	ROE-10 mm	10	43.18	27.94	7.62	20.32	17.78	13
819221	ROE-11 mm	11	43.18	27.94	7.62	20.32	17.78	20
819222	ROE-12 mm	12	45.72	33.02	7.62	20.32	17.78	23
819223	ROE-13 mm	13	45.72	33.02	7.62	20.32	17.78	23
819224	ROE-14 mm	14	45.72	33.02	7.62	20.32	17.78	27
819225	ROE-15 mm	15	45.72	40.64	7.62	22.86	17.78	27
819226	ROE-16 mm	16	45.72	40.64	7.62	22.86	17.78	40
819227	ROE-17 mm	17	45.72	40.64	7.62	22.86	17.78	54
819228	ROE-18 mm	18	45.72	40.64	7.62	22.86	17.78	54
819229	ROE-19 mm	19	48.26	45.72	10.16	25.4	20.32	68
819231	ROE-22 mm	22	50.8	53.34	10.16	33.02	20.32	101
819232	ROE-24 mm	24	50.8	53.34	10.16	33.02	20.32	118
819233	ROE-27 mm	27	53.34	58.42	12.7	33.02	20.32	152
819234	ROE-28 mm	28	53.34	58.42	12.7	33.02	20.32	170
819235	ROE-29 mm	29	58.42	71.12	12.7	33.02	20.32	152



SLIM PROFILE OPEN END (OE SPH)

1 1/16" Common Centerline / 36.5 mm Common Centerline

Part No.	Model	Size (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Torque Rating (Nm)
853912	OE-13 mm SPH	13	45.62	28.58	5.87	22.23	17.45	37 Nm
853913	OE-17 mm SPH	17	48.41	27.66	5.77	22.23	17.45	25 Nm
853871	OE-19 mm SPH	19	47.50	40.01	4.50	25.40	20.62	45 Nm
853872	OE-22 mm SPH	22	48.77	35.23	7.01	31.75	20.62	38 Nm
853873	OE-24 mm SPH	24	49.63	42.49	6.50	31.75	20.62	71 Nm
853874	OE-27 mm SPH	27	50.80	44.50	7.49	31.75	20.62	100 Nm
853875	OE-30 mm SPH	30	52.10	48.01	7.75	31.75	20.62	103 Nm
853914	OE-32 mm SPH	32	59.13	50.47	11.00	31.75	20.62	103 Nm
853876*	OE-36 mm SPH	36	118.01	57.76	10.01	38.10	22.35	152 Nm
853877*	OE-41 mm SPH	41	120.04	68.53	9.50	38.10	22.35	260 Nm
853923*	OE-50 mm SPH	50	123.95	85.85	11.00	38.10	22.35	275 Nm

* 3/8" Common Centerline / 98.4mm Common Centerline

WARNING




- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59





BOX HEAD (BH)

1/16" Common Centerline / 36.5 mm Common Centerline



Part No.	Model	Size (in.)	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	Max Torque (in. lbs.)
819060	BH - 1/4	1/4	1 ⁴⁵ / ₆₄	1 ⁷ / ₃₂	9 ⁹ / ₃₂	3/4	1 ¹ / ₁₆	250
819061	BH - 5/16	5/16	1 ⁴⁵ / ₆₄	1 ⁷ / ₃₂	9 ⁹ / ₃₂	3/4	1 ¹ / ₁₆	350
819062	BH - 3/8	3/8	1 ³ / ₄	5/8	9 ⁹ / ₃₂	3/4	1 ¹ / ₁₆	450
819063	BH - 7/16	7/16	1 1 ¹³ / ₁₆	3/4	2 ²³ / ₆₄	3/4	1 ¹ / ₁₆	650
819064	BH - 1/2	1/2	1 ⁵⁵ / ₆₄	2 ⁷ / ₃₂	3/8	3/4	1 ¹ / ₁₆	850
819065	BH - 9/16	9/16	2	1	1 ¹³ / ₃₂	7/8	1 ¹ / ₁₆	1050
819066	BH - 5/8	5/8	2	1 ¹ / ₁₆	3 ³⁵ / ₆₄	1 ⁵ / ₁₆	1 ³ / ₁₆	1250
819067	BH - 11/16	11/16	2	1 ¹ / ₈	1/2	1 ⁵ / ₁₆	1 ³ / ₁₆	1450
819068	BH - 3/4	3/4	2 ¹ / ₁₆	1 ¹ / ₄	3 ³⁵ / ₆₄	1	1 ³ / ₁₆	1800
819070	BH - 7/8	7/8	2 ¹ / ₄	1 ⁵ / ₁₆	5/8	1 ¹ / ₄	1 ³ / ₁₆	2400
819071	BH - 15/16	15/16	2 ¹ / ₄	1 ¹ / ₂	2 ²¹ / ₃₂	1 ¹ / ₄	1 ³ / ₁₆	2700
819072	BH - 1	1	2 ¹ / ₄	1 ⁹ / ₁₆	2 ²³ / ₃₂	1 ¹ / ₄	1 ³ / ₁₆	3000
819073	BH - 1 1/16	1 ¹ / ₁₆	2 ¹ / ₄	2 ¹ / ₁₆	7/8	1 ¹ / ₄	1 ³ / ₁₆	3150
819074	BH - 1 1/8	1 ¹ / ₈	2 ¹ / ₂	2 ¹ / ₁₆	7/8	1 ¹ / ₄	1 ³ / ₁₆	3300
819075	BH - 1 1/4	1 ¹ / ₄	2 ¹ / ₂	2 ¹ / ₁₆	7/8	1 ¹ / ₄	1 ³ / ₁₆	3600

Part No.	Model	Size (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Max. Torque (Nm)
809301	BH-7 mm	7	43.18	12.7	7.62	20.32	20.32	28
809302	BH-8 mm	8	43.18	12.7	7.62	20.32	20.32	39
809303	BH-9 mm	9	45.72	15.24	7.62	20.32	20.32	50
809230	BH-10 mm	10	45.72	15.24	7.62	20.32	20.32	50
809231	BH-11 mm	11	45.72	20.32	10.16	20.32	20.32	73
809304	BH-12 mm	12	45.72	20.32	10.16	20.32	20.32	96
809232	BH-13 mm	13	45.72	20.32	10.16	20.32	20.32	96
809233	BH-14 mm	14	48.26	25.4	10.16	22.86	20.32	119
809234	BH-15 mm	15	50.8	27.94	12.7	25.4	22.86	141
809305	BH-16 mm	16	50.8	27.94	12.7	25.4	22.86	141
809235	BH-17 mm	17	50.8	27.94	12.7	25.4	22.86	163
809306	BH-18 mm	18	50.8	27.94	12.7	25.4	22.86	163
809236	BH-19 mm	19	53.34	33.02	15.24	25.4	22.86	203
809309	BH-20 mm	20	53.34	33.02	15.24	25.4	22.86	225
809307	BH-21 mm	21	53.34	33.02	15.24	25.4	22.86	237
809308	BH-22 mm	22	55.88	35.56	15.24	33.02	22.86	271
809237	BH-24 mm	24	55.88	35.56	17.78	33.02	22.86	305
809352	BH-27 mm	27	55.88	40.64	17.78	33.02	22.86	355

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59

Dovetail vs. Quick Change Wrenches


Dovetail wrenches use our CART tool to change heads. Quick Change versions require only your thumb.

These heads are available on the Exacta 2 1100, 1200, and 1250 Series digital torque wrenches.





Part No.	Model	Size (in.)	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	F (in.)	Max Torque (in. lbs.)
819025	FN-1/4	1/4	1 3/4	5/8	1 1/32	3/4	1 1/16	3/16	100
819026	FN-5/16	5/16	1 13/16	5/8	23/64	3/4	1 1/16	3/16	150
819027	FN-3/8	3/8	1 55/64	27/32	3/8	3/4	1 1/16	9/32	200
819028	FN-7/16	7/16	1 55/64	27/32	3/8	3/4	1 1/16	1 1/32	250
819029	FN-1/2	1/2	1 31/32	1 1/16	13/32	7/8	1 1/16	3/8	300
819030	FN-9/16	9/16	1 31/32	1 1/16	15/32	1	1 3/16	7/16	350
819031	FN-5/8	5/8	2	1 1/8	17/32	1	1 3/16	17/32	400
819032	FN-11/16	11/16	2 1/16	1 5/16	35/64	1	1 3/16	17/32	475
819033	FN-3/4	3/4	2 1/16	1 5/16	35/64	1	1 3/16	17/32	600
819034	FN-13/16	13/16	2 1/4	1	5/8	1 1/4	1 3/16	5/8	700
819035	FN-7/8	7/8	2 1/4	1 1/2	21/32	1 1/4	1 3/16	1 1/16	800
819036	FN-15/16	15/16	2 3/8	1 9/16	23/32	1 1/4	1 3/16	23/32	900
819037	FN-1	1	2 1/2	1 9/16	23/32	1 1/4	1 3/16	3/4	1000
819038	FN-1 1/16	1 1/16	2 1/2	1 9/16	7/8	1 1/4	1 3/16	3/4	1050



Part No.	Model	Size (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Max Torque (Nm)
809243	FN-8 mm	8	45.72	20.32	10.16	20.32	20.32	7.62	16
809217	FN-9 mm	9	45.72	20.32	10.16	20.32	20.32	7.62	19
809218	FN-10 mm	10	45.72	20.32	10.16	20.32	20.32	7.62	22
809221	FN-11 mm	11	45.72	20.32	10.16	20.32	20.32	7.62	28
809241	FN-12 mm	12	48.26	25.40	10.16	22.86	20.32	10.16	30
809219	FN-13 mm	13	48.26	25.40	10.16	22.86	20.32	10.16	33
809220	FN-14 mm	14	50.80	27.94	12.70	25.40	20.32	10.16	40
809222	FN-15 mm	15	50.80	27.94	12.70	25.40	20.32	10.16	45
809238	FN-16 mm	16	50.80	27.94	12.70	25.40	20.32	12.70	50
809223	FN-17 mm	17	53.34	33.02	15.24	25.40	20.32	12.70	54
809239	FN-18 mm	18	53.34	33.02	15.24	25.40	20.32	15.24	61
809224	FN-19 mm	19	53.34	33.02	15.25	25.40	20.32	15.24	68
809240	FN-21 mm	21	53.34	38.10	17.78	33.02	20.32	17.78	80
809242	FN-22 mm	22	55.88	38.10	17.78	33.02	20.32	17.78	90
809225	FN-24 mm	24	55.88	40.64	17.78	33.02	20.32	17.78	105

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 57


What is the Common Centerline and why is it important?
<http://www.srtorque.com/resources/understanding-the-common-centerline/>

Custom Solutions
 In addition to our established line of interchangeable heads, SR offers custom solutions to meet your unique torque needs. For more information on custom heads and other solutions please contact SR customer service world wide at +1 847-455-8677




HEX DRIVE (HD)

1 1/16" Common Centerline / 36.5 mm Common Centerline



Part No.	Model	Size (in.)	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	Max. Torque (in. lbs.)
819687	HD-3/32	3/32	1.7	0.5	0.8	0.8	0.7	30
819689	HD-1/8	1/8	1.7	0.5	0.8	0.8	0.7	70
853032	HD-9/64	9/64	1.7	0.5	0.8	0.8	0.7	70
819691	HD-5/32	5/32	1.7	0.5	1.0	0.8	0.7	135
819692	HD-3/16	3/16	1.7	0.5	1.0	0.8	0.7	235
819693	HD-7/32	7/32	1.8	0.6	1.0	0.8	0.7	340
819694	HD-1/4	1/4	1.8	0.6	1.0	0.8	0.7	450
819695	HD-5/16	5/16	1.8	0.8	1.0	0.8	0.7	850
819696	HD-3/8	3/8	1.8	0.8	1.0	0.8	0.7	850
819701	HD-3/4	3/4	2.2	1.4	2.0	1.3	0.8	2400
819702	HD-7/8	7/8	2.2	1.5	2.0	1.3	0.8	2700

Part No.	Model	Size (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Max. Torque (Nm)
809315	HD-4 mm	4	43.18	12.70	25.40	20.32	2.32	14
809316	HD-5 mm	5	43.18	12.70	25.40	20.32	20.32	27
809317	HD-6 mm	6	45.72	15.24	25.40	20.32	20.32	37
809328	HD-8 mm	8	45.72	20.32	25.40	20.32	20.32	95
809330	HD-10 mm	10	48.26	25.40	25.40	22.86	20.32	141



SQUARE DRIVE (SD)

1 1/16" Common Centerline / 36.5 mm Common Centerline

Part No.	Model	Drive Size (in.)	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	Max Torque (in. lbs.)
819057	SD - 1/4	1/4	1 1/4	7/8	3/4	5/8	1 1/16	250
819058	SD - 3/8	3/8	1 7/8	7/8	3/4	5/8	1 1/16	1250
819059	SD - 1/2	1/2	1 15/16	15/16	3/4	5/8	1 1/16	2500
819119*	SD - 3/4	3/4	5 9/64	1 1/2	1 3/4	7/8	1 1/16	4800

* 3 3/8" Common Centerline / 98.4mm Common Centerline

CROWFOOT ADAPTER

- Gain the significant advantage of our interchangeable head system by attaching the SRA to any fixed square drive wrench.
- Ideal for use when a direct reading torque wrench is required but space is limited.
- Use of an adapter requires calculation of torque output.
- When used with our 1 7/16" / 36.5mm Interchangeable Heads the adapter length will be 3" or 76.2mm.



Part No.	Model	Description
850653	SRA-3/8	3/8 Female-Male Dovetail
850655	SRA-1/2	1/2 Female-Male Dovetail

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59




RATCHETING FLARE NUT (RFN)

1/8" Common Centerline / 36.5 mm Common Centerline

Single-direction ratchet for use with hydraulic or pneumatic fittings.

Part Number	Model	Size (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Max. Torque (Nm)
819086	RFN-10 mm	10	50.8	7.62	15.24	22.86	17.78	45
819087	RFN-11 mm	11	50.8	7.62	15.24	22.86	17.78	45
819088	RFN-12 mm	12	50.8	7.62	15.24	22.86	17.78	45
819090	RFN-13 mm	13	50.8	7.62	15.24	22.86	17.78	45



LTCE-SERIES & LTCE-15 SERIES


Straight & 15 Degree Angled Extension

Part No.	Model	Angle (degrees)	A (in.)	B (in.)	C (in.)	D (in.)	Max. Torque (in. lbs)
819424	LTCE - 4	0	4	1 1/8	3/8	1 1/8	300
819467	LTCE - 6	0	6	1 1/4	3/8	1 1/8	800
819487	LTCE - 4 - 15	15	4	1 1/8	3/8	1 1/8	300
819504	LTCE - 6 - 15	15	6	1 1/4	3/8	1 1/8	800
819021	LTCE - 14	0	14	1 3/4	3/8	1 1/2	800






Do not use these with CCM-Series torque wrenches.

Preset the torque wrench after the extension and fastener engagement head have been attached to the tool.



Angled 15° to Tool Centerline



WARNING




- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59



STANDARD TOOLING ADAPTERS

When fabricating special heads to be used with CCM torque handles other than Model CCM 300 and CCM 400, the 1 $\frac{1}{8}$ " / 36.5mm dimension must be maintained between the inside of the attachment block and the centerline of the wrench head. Model CCM 300 and CCM 400 are calibrated to 3 $\frac{7}{8}$ " / 98.4mm common centerline.




Part No.	Model	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	Max. Torque (in. lbs.)
819901	STA - 1	1 $\frac{5}{16}$	9 $\frac{9}{16}$	1 $\frac{1}{4}$	3 $\frac{3}{4}$	1 $\frac{11}{16}$	1600
819902	STA - 2	1 $\frac{3}{16}$	7 $\frac{7}{8}$	1 $\frac{11}{32}$	1 $\frac{1}{8}$	1 $\frac{13}{16}$	2500
809917	STA - 3	1 $\frac{1}{2}$	1 $\frac{1}{2}$	1 $\frac{1}{2}$	1 $\frac{1}{2}$	1	4800



ADAPTERS FOR DIN STYLE HEADS

- Can be used to convert most DIN style heads to a female dovetail for use on all SR LTC series wrenches. Torque values should be set with the adapter and head attached to the wrench.
- Because of the variation in the length of the DIN plug type heads, it is not recommended that this adapter be used with CCM micrometer adjustable wrenches.




Part No.	Model	A (in.)	B (in.)	C (in.)
819136	Adapter, 9mm x 12mm	1 $\frac{23}{64}$	1 $\frac{1}{16}$	1
819137	Adapter, 14mm x 18mm	1 $\frac{23}{64}$	1 $\frac{1}{4}$	1 $\frac{13}{16}$



ADAPTERS FOR ROUND STYLE HEADS

- Can be used to convert most round style heads to a female dovetail for use on all SR LTC series wrenches. Torque values should be set with the adapter and head attached to the wrench.
- Because of the variation in the length of the round plug type heads, it is not recommended that this adapter be used with CCM micrometer adjustable wrenches.



Part No.	Model	Description	A (in.)	B (in.)	C (in.)	D (in.)	Max. Torque (in. lbs.)
853021	BAJ	"J" size female-female dovetail	1 $\frac{13}{32}$	1 $\frac{1}{4}$	3 $\frac{3}{4}$	1 $\frac{13}{16}$	2500
853022	BAY	"Y" size female-female dovetail	1 $\frac{13}{32}$	1 $\frac{1}{4}$	3 $\frac{3}{4}$	1 $\frac{13}{16}$	2500

⚠ WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59



What is the Common Centerline?

The SR Advantage

Interchangeable heads offer flexibility and cost savings.

Interchangeable heads with common centerline offer greater accuracy and consistency in torque application.

SR offers over 200 heads combining maximum flexibility with tools you trust.



- The formula for torque application is $T = F \times r \times \sin\theta$. T = torque. F = linear force. r = distance measured from the axis of rotation to where the application of linear force takes place.
- The centerline is the distance between the center of the fastener and the top of the wrench where the head stops and the wrench starts.
- Distance in the torque equation “r” can be changed by changing the length of the centerline. This changes torque output.
- Sturtevant Richmond wrenches all come with two common centerlines. This means you can change between heads in with the same common centerline and not change the torque output.
- If you change to the second common centerline, we have a torque slide ruler that immediately tells you the new torque output result.

**Got more than a minute?
Click to learn more!**

SR Web Resource



**What is the
Common
Centerline?**


WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59



Comes with blow molded case.

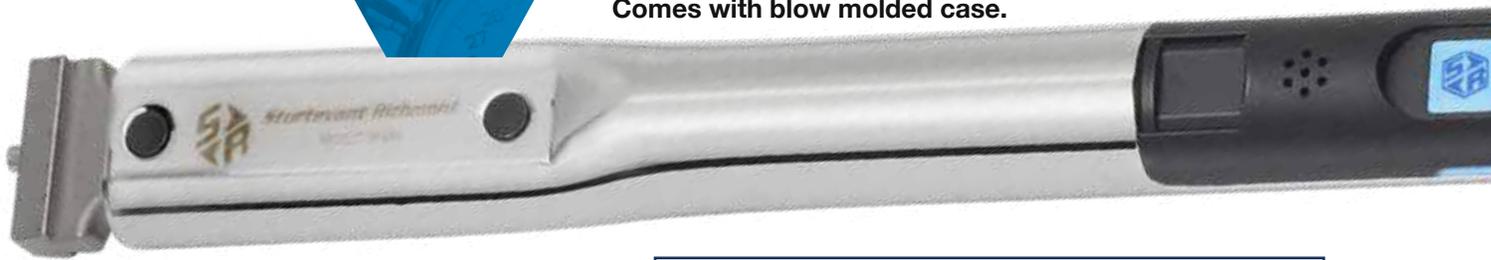

DTC

Interchangeable Head Digital Torque and Angle Wrench

- Meets/exceeds ASME B107.300-2010 and ISO 6789 requirements
- Bi-directional +/- 2% Indicated Value from 20% to 100% of tool capacity.
- All torque and angle settings can be set using buttons on wrench or DTC Connect Freeware.
- Built around our traditional pin/spring Dovetail you have access to over 200 interchangeable heads.
- SDRT head included with wrench.
- Head length is adjustable via keypad. Uses 1 7/16" (36.5 mm) or 3 7/8" (98.4 mm) and maintains common centerline.
- Visible from any angle, light bands on both sides of the wrench turn yellow, then green, the wrench beeps, and the handle vibrates when target torque is achieved.

Five Modes of Operation:

- TAM (torque and angle monitoring – double hit protection and identifies changing joint conditions)
- T2A (torque to angle – for highly engineered assemblies)
- Track Mode (displays torque value as torque is applied. No angle measurement)
- Residual (measures existing torque on previously tightened fasteners)
- Peak (all torque, no angle measurement)

- Three AAA batteries included with wrench. Works with rechargeable NiMH, Lithium Ion, or alkaline batteries.
- Target, minimum, and maximum torque entered via wrench keypad or DTC Connect Freeware.
- Lockable settings (and presets), via 4-digit password.
- Torque units: in.lb., ft.lb., Nm, cNm, cmkg, mkg.
- 99 presets, numbered 01-99, optionally named via serial command with up to 16-character names.
- Results log large enough for even the busiest assemblies. Download results in csv. format via mini-USB port.
- New, smaller profile fits in more places with light-weight, rugged design.
- Comes with free Certificate of Compliance from our ISO/IEC 17025 Accredited Laboratory.

Click here for video

DTC: Tale of the Tape



Part No.	Model	Torque Capacity	Overall Length	Weight without head	Included Head
10680	DTC 4	50 in lb/5.6 Nm	13.88 in	1.04 lb	1/4" SDRT
10681	DTC 25	300 in lb/33.9 Nm	14.88 in	1.14 lb	3/8" SDRT
10682	DTC 75	900 in lb/101.7 Nm	16.5 in	1.29 lb	3/8" SDRT
10683	DTC 150	1800 in lb/203 Nm	19.75 in	1.55 lb	1/2" SDRT
10684	DTC 250	3000 in lb/338.9 Nm	27.68 in	2.18 lb	1/2" SDRT

All models come with our traditional Pin and Spring Dovetail which gives you access to using more than 200 SR one-piece, interchangeable heads. Wrenches calibrated for use with heads having 1 7/16" (36.5mm) common centerline. On request wrenches can be calibrated for 3 7/8" (98.4mm) centerline. The DTC can change the common centerline head length in the software setting and not have to recalibrate the tool.

NiMH Batteries rated 1400 mAh to 2400 mAh are acceptable. Higher mAh ratings mean more cycles between recharge and longer recharge times.

Unlike our other digital torque wrenches, the DTC can use alkaline, Ni-MH, or Lithium Ion batteries. Never mix types of batteries (e.g. never combine alkaline and Ni-MH batteries, or Ni-MH and Lithium Ion batteries) and never mix new and old

batteries in the DTC.

Although the DTC uses both alkaline and rechargeable batteries, we recommend rechargeable batteries because they are environmentally friendly.

The DTC uses three AAA batteries in a cartridge.



**Sturtevant
Richmont**



DTC Connect

***Make your DTC Torque and
Angle Wrench even more
powerful ... FOR FREE!***



When you connect your DTC with DTC Connect Software you can:

- set unit of measure, torque mode, and torque values directly from your Windows PC.
- set, change, name and save parameters
- download the results log from the wrench and upload the CSV formatted file to Excel or another program.
- say goodbye to terminal emulator programs with this Windows PC-based software

Only available to those who purchase and register DTC Torque and Angle Wrenches Registered users receive updates and upgrades emailed directly to them.

Registration is fast and simple at srtorque.com We just need your contact information, tool capacity, and seven digit tool serial number. The serial number is found on the underside of the flattened case, near the dovetail.

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59



Comes with blow molded case.



Exacta 2

Bi-directional Interchangeable Head Digital Torque and Angle Wrench

- Bi-directional accuracy of +/- 1% of Indicated Value from 20% to 100% of capacity in Track and Peak modes meets or exceeds requirements of ASME B107.300-2010 and ISO 6789.
- The residual mode makes this a great tool for auditing previously fastened joints.
- The display changes color with yellow/green/red sequence to inform operator status.
- Audible prompts from a beeper supplement visual information.
- Exacta® 2 comes with a serial cable for communication with a PC.
- Simple front panel programming. Four keyswitches on the front of the Exacta® 2 electronics module permit programming and operation of all key functions.
- 999 memory locations can be accessed, reviewed, uploaded and printed - all from the front keypad!
- Free Exawin software for programming Exacta® 2 from a PC.
- Four of six models have the SR dovetail and can be used with SR Interchangeable Heads.
- The Exacta® 2 uses four (4) AA NiMH batteries
- Includes FREE calibration certificate from our ISO/IEC 17025 Accredited Laboratory.



Part No.	Model	Torque Capacity	Lever Length	Overall Length	Weight	Head
10530	Exacta 2 - 25	25 ft lb/33.8 Nm	12.5" / 317 mm	16.1" / 409 mm	2.8 lbs/ 1.27 kg	Dovetail
10531	Exacta 2 - 75	75 ft lb/101.5 Nm	15.8" / 401mm	19.4" / 493 mm	3.0 lbs / 1.36 kg	Dovetail
10532	Exacta 2 - 150	150 ft lb/203.3 Nm	17.8" / 452 mm	21.5" / 546 mm	3.1 lbs/ 1.40 kg	Dovetail
10536	Exacta 2 - 250	250 ft lb/338.9 Nm	21.0" / 533 mm	21.2"/538mm	23.0"/584mm	Dovetail
10533	Exacta 2 - 250 R	250 ft lb/338.9 Nm	21.0" / 533 mm	20.8"/527mm	25.0"/634mm	1/2" SD Ratchet
10535*	Exacta 2 - 400	400 ft lb/543 Nm	36.5" / 927.1 mm	35.9"/912mm	35.2"/895mm	Dovetail
10537	Exacta 2 - 400 R	400 ft lb/543 Nm	36.5" / 927.1 mm	33.7"/856mm	38.3"/973mm	3/4" SD Ratchet
10534	Exacta 2 - 600 R	600 ft lb/813.5 Nm	55.1" / 1399 mm	59.7" / 1516 mm	13.0 lbs. / 5.90 kg	3/4" SD Ratchet
10521	Exacta 2 - 25 QC	25 ft lb/33.8 Nm	12.5" / 317 mm	16.1" / 409 mm	2.8 lbs/ 1.27 kg	Quick Connect
10522	Exacta 2 - 75 QC	75 ft lb/101.5 Nm	15.8" / 401mm	19.4" / 493 mm	3.0 lbs / 1.36 kg	Quick Connect
10523	Exacta 2 - 150 QC	150 ft lb/203.3 Nm	17.8" / 452 mm	21.5" / 546 mm	3.1 lbs/ 1.40 kg	Quick Connect
10518	Exacta 2 - 250 QC	250 ft lb/338.9 Nm	21.0" / 533 mm	25.2" / 640 mm	4.1 lbs/ 1.86 kg	Quick Connect
21259	Charger & 4 AA NiMH	4 AA NiMH 1400 mAh batteries & charger, NAFTA only				
816261	AA NiMH Batteries	1400 mAh NiMH batteries, 4-pack				

*Wrenches calibrated for use with heads having 3 7/8" (98.4mm) common centerline. On request wrenches can be calibrated for 1 7/16" (36.5mm) centerline.

NiMH Batteries rated 1400 mAh to 2400 mAh are acceptable. Higher mAh ratings mean more cycles between recharge and longer recharge times. Use only NiMH AA rechargeable batteries in the 1200 Series Exacta 2 wrenches. Other batteries will damage the wrench and void the warranty.

We build highly durable tools with sophisticated electronics. We design circuits to be as energy efficient as possible. We are also concerned about the environment.

Our tool and tester circuit boards are designed on the highly consistent 1.2 volt power curve provided by rechargeable NiMH batteries. Other batteries like Alkaline or Lithium batteries provide 1.5 volts in the power curve. The additional voltage will damage the circuit board.



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59






Interchangeable Head Micrometer Adjustable

CCM Series

- Incredible Versatility! Accepts well over 200 interchangeable heads, as well as custom heads and extensions, and offers micrometer torque adjustment!
- The +/- 4% Indicated Value Accuracy meets or exceeds ASME B107.300 - 2010, AS 28431 and ISO 6789.
- Fast adjustment—takes the fewest rotations of any tool to reach full scale!
- Includes FREE calibration certificate from our ISO/IEC 17025 Accredited Laboratory.
- Excellent audible and tactile impulse when set torque achieved.
- Unique dovetail design transmits the load at right angle from the wrench to the head; exceptional strength and rigidity of connection.
- The pin lock assures positive head connection, yet permits head changeover in seconds!

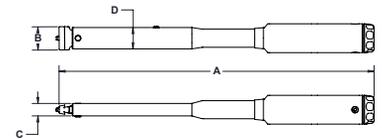

Part No.	Model	Torque Capacity	Steps of Graduations	A (in.)	B (in.)	C (in.)	D (in.)	Weight (lbs)
869769	CCM 50 I MG	10 in lb-50 in lb	1 in lb	10 1/8	3/4	17/32	15/16	0.5
869765	CCM 150 I MG	30 in lb-150 in lb	2 in lb	10 1/64	3/4	17/32	15/16	0.5
869773	CCM 200 I MG	40 in lb-200 in lb	2 in lb	10 1/64	3/4	17/32	15/16	0.5
869763	CCM 600 I MG	100 in lb-600 in lb	5 in lb	13 17/32	1	17/32	15/16	1
869766	CCM 750 I MG	150 in lb-750 in lb	5 in lb	13 17/32	1	17/32	15/16	1
869764	CCM 1200 I MG	200 in lb-1200 in lb	10 in lb	16 29/32	1 1/4	17/32	15/16	1.1
869762	CCM 1800 I MG	300 in lb-1800 in lb	10 in lb	16 9/16	1 1/4	17/32	15/16	1.3
869770	CCM 75 MG	15 ft lb-75 ft lb	1/2 ft lb	13 41/64	1	17/32	15/16	1
869771	CCM 150 MG	30 ft lb-150 ft lb	1 ft lb	17 7/64	1 1/4	17/32	15/16	1.3
810335*	CCM 300 MG	50 ft lb-300 ft lb	2 1/2 ft lb	25 29/32	1 3/4	43/64	2	6.5
810772*	CCM 400 MG	80 ft lb-400 ft lb	5 ft lb	35	1 3/4	43/64	2	8.3

Part No.	Model	Torque Capacity	Steps of Graduations	A (mm)	B (mm)	C (mm)	D (mm)	Weight (kg)
869784	CCM 6 Nm MG	1 Nm-6 Nm	.1 Nm	259.36	19.05	13.49	23.81	0.2
869785	CCM 20 Nm MG	4 Nm-20 Nm	.2 Nm	257.63	19.05	13.49	23.81	0.2
869786	CCM 100 Nm MG	20 Nm-100 Nm	0.5 Nm	347.39	19.05	13.49	23.81	0.5
869787	CCM 200 Nm MG	40 Nm-200 Nm	1 Nm	426.43	31.75	13.49	23.81	0.6
810788*	CCM 400 Nm	75 Nm-400 Nm	2.5 Nm	649.93	50.6	17.02	50.93	3
810794*	CCM 600 Nm	100 Nm-600 Nm	5 Nm	903.92	50.6	17.02	50.93	3.8

*Wrenches calibrated for use with heads having 3 7/8" (98.4mm) common centerline. On request wrenches can be calibrated for 1 7/16" (36.5mm) centerline.



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59



Interchangeable Head Preset

LTC Series


If we preset the torque value at the factory, we include a Calibration Certificate.

If we do not preset the torque value, you may request a Calibration Certificate.

- The LTC-Series is superb for use on the assembly line AND in field maintenance kits!
- The +/- 4% Accuracy meets or exceeds ASME B107.300 - 2010 and ISO 6789, and provides the quality your customers demand!
- Extremely versatile system permits use of fewer wrenches by connecting to well over 100 standard interchangeable heads, plus extensions, adapters, and your own custom heads!
- Excellent audible and tactile impulse when set torque achieved.
- Unique dovetail design transmits the load at right angle from the wrench to the head; exceptional strength and rigidity of connection.
- Light weight new comfort grip provides superior ergonomics, reducing operator fatigue.
- Extension Handle Part No. 853601 extends tool length for wrenches up to 3000 inch pounds. Handle Extension 853538 extends tool length for wrenches larger than 30001.

Click here for video

**Error Proofing by
Design: Clickers**

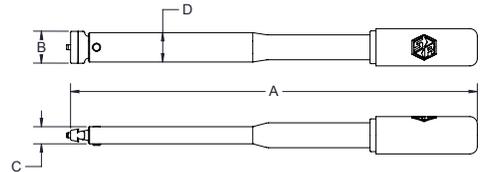

Part No.	Model	Torque Capacity	A (in.)	B (in.)	C (in.)	D (in.)	Weight (lbs.)
810100	LTC 50 I	10 in lb-50 in lb / 1.2 Nm-6 Nm	6 15/16	3/4	17/32	15/16	0.5
810011	LTC 150 I	30 in lb-150 in lb / 3.4 Nm-17 Nm	6 15/16	3/4	17/32	15/16	0.5
810574	LTC 300 I OHT	150 in lb -300 in lb / 17 Nm-34 Nm	6 15/16	3/4	17/32	15/16	0.5
810016	LTC 300 I	60 in lb-300 in lb / 6.8 Nm-34 Nm	8 59/64	3/4	17/32	15/16	0.8
810013	LTC 750 I	150 in lb-750 in lb / 17 Nm-85 Nm	12 47/64	1	17/32	15/16	1.0
810014	LTC 1800 I	360 in lb-1800 in lb / 40.8 Nm-204 Nm	16 11/64	1 1/4	17/32	15/16	1.3
810054	LTC ERGO 1800 I	360 in lb-1800 in lb / 40.8 Nm-204 Nm	20 9/16	1 1/4	17/32	15/16	1.5
810802	LTC 3000 I	600 in lb-3000 in lb / 67.79 Nm-338 Nm	20 51/64	1 1/2	5/8	1	4.9
810334	LTC 3600 I	720 in lb-3600 in lb / 81.4 Nm-407 Nm	24 21/64	1 3/4	49/64	2	5.5
810137	LTC 4800 I	960 in lb -4800 in lb / 108.4 Nm-542 Nm	34 11/32	1 3/4	49/64	2	8.3

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59



Bi-directional preset interchangeable head torque wrenches are ideal for applications where:

- The fastener or fitting to be tightened cannot readily be engaged with a socket.
- Very high durability is important.

These needs are common in assembly and standardized field maintenance operations, and the BLT-Series tools are superb for these types of applications.

- SR Dovetail Head connects to over 200 SR Interchangeable Heads. All of our interchangeable heads fit on all of our dovetail wrenches, meaning you don't have to buy multiple wrenches and heads in the same torque range to cover all fastener sizes.
- BLT-Series torque wrenches have CW +/- 4% Indicated Value Accuracy and CCW +/- 6% Indicated Value Accuracy from 20% to 100% of capacity, meeting or exceeding the requirements of ASME B107.300-2010 and ISO 6789.
- Error Proofing By Behavior Modification: excellent tactile and audible pulse when the preset torque is achieved.
- Error Proofing By Design: the flattened case prevents side-loading and ensures greater accuracy and durability.
- Comfortable cushion grip plus light-weight for excellent ergonomics.
- The torque is preset and locked in with a special CART tool.
- Torque can be set using any unit of measurement.
- Can be ordered preset from factory or you can set the torque with your own torque tester.
- All of our tools provide torque measurement in the clockwise direction. The BLT preset click wrench measures torque in both clockwise and counter clockwise directions.

Bidirectional Interchangeable Head Preset

BLT Series


If we preset the torque value at the factory, we include a Calibration Certificate.

If we do not preset the torque value, you may request a Calibration Certificate.

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59

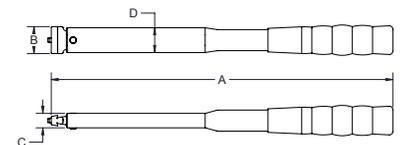

Part No.	Model	Torque Capacity	A (in.)	B (in.)	C (in.)	D (in.)	Weight (lbs.)
874100	BLT 50 I	10 in lb-50 in lb / 1.2 Nm-6 Nm	8 ²⁷ / ₃₂	3/4	17/32	15/16	0.8
874011	BLT 150 I	30 in lb-150 in lb / 3.4 Nm-17 Nm	8 ²⁷ / ₃₂	3/4	17/32	15/16	0.8
874016	BLT 300 I	60 in lb-300 in lb / 6.8 Nm-34 Nm	8 ²⁷ / ₃₂	3/4	17/32	15/16	0.8
874574	BLT 300 I OHT	150 in lb-300 in lb / 6.8 Nm-34 Nm	8 ²⁷ / ₃₂	3/4	17/32	15/16	0.8
874013	BLT 750 I	150 in lb -750 in lb / 17 Nm-85 Nm	12 ²¹ / ₃₂	1	17/32	15/16	1.0
874014	BLT 1800 I	360 in lb-1800 in lb / 40.8 Nm-204 Nm	16 ³ / ₃₂	1 1/4	17/32	15/16	1.3
874054	BLT 1800 I ERGO	360 in lb-1800 in lb / 40.8 Nm-204 Nm	20 ¹⁵ / ₃₂	1 1/4	17/32	15/16	5.5
874334	BLT 3600 I	720 in lb-3600 in lb / 81.4 Nm-407 Nm	24 ²¹ / ₆₄	1 3/4	43/64	2	5.5
874137	BLT 4800 I	960 in lb-4800 in lb / 108.4 Nm-542 Nm	34 ²¹ / ₆₄	1 3/4	43/64	2	8.3

SDR Series

Square Drive Ratchet Micrometer Adjustable




- Fastest torque adjustment across the scale via rotating grip.
- Locking tail piece prevents inadvertent target torque change.
- Ball bearing rockover assembly assures smooth operation, enhances repeatability and increases the cycle life of the wrench.
- At set torque value a strong audible and tactile impulse is emitted.
- Includes storage case.
- Ratchet design is very strong and durable.
- Accuracy of +/- 4% Indicated Value (from 20% to 100% of capacity) meets or exceeds ASME B107.300 - 2010, ISO 6789, and AS 28431.
- Includes FREE calibration certificate from our ISO/IEC 17025 Accredited Laboratory.

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59



SDR Fixed Ratchet Head Series

Part No.	Model	Torque Capacity	Steps of Graduation	Square Drive (in.)	A (in.)	B (in.)	C (in.)	D (in.)	Weight (lbs)
869749	2 SDR 50 I MG	10 in lb-50 in lb	1 in lb	1/4	11 ¹⁵ / ₆₄	³¹ / ₃₂	⁵¹ / ₆₄	¹⁵ / ₁₆	1.0
869750	2 SDR 150 I MG	10 in lb-50 in lb	2 in lb	1/4	11 ³⁹ / ₆₄	³¹ / ₃₂	⁵¹ / ₆₄	¹⁵ / ₁₆	1.0
869781	2 SDR 200 I MG	40 in lb-200 in lb	2 in lb	1/4	10 ²³ / ₃₂	³¹ / ₃₂	⁵¹ / ₆₄	¹⁵ / ₁₆	1.0
869751	3 SDR 150 I MG	30 in lb-150 in lb	2 in lb	3/8	11 ¹⁹ / ₃₂	1 ¹¹ / ₃₂	1 ¹ / ₁₆	¹⁵ / ₁₆	1.1
869761	3 SDR 200 I MG	40 in lb-200 in lb	2 in lb	3/8	11 ²³ / ₃₂	1 ¹¹ / ₃₂	1 ¹ / ₁₆	¹⁵ / ₁₆	1.1
869748	3 SDR 600 I MG	100 in lb-600 in lb	5 in lb	3/8	15 ¹¹ / ₃₂	1 ³ / ₈	1 ¹ / ₁₆	¹⁵ / ₁₆	1.5
869752	3 SDR 750 I MG	150 in lb-750 in lb	5 in lb	3/8	15 ⁵ / ₃₂	1 ³ / ₈	1 ¹ / ₁₆	¹⁵ / ₁₆	1.5
869747	3 SDR 1200 I MG	200 in lb-1200 in lb	10 in lb	3/8	18 ²⁵ / ₆₄	1 ³ / ₈	1 ¹ / ₁₆	¹⁵ / ₁₆	1.5
869755	4 SDR 1800 I MG	300 in lb-1800 in lb	10 in lb	1/2	18 ⁴⁵ / ₆₄	1 ⁶¹ / ₆₄	1 ²⁷ / ₆₄	¹⁵ / ₁₆	2.0
869756	3 SDR 75 MG	15 ft lb-75 ft lb	.5 ft lb	3/8	14 ³¹ / ₃₂	1 ³ / ₈	1 ¹ / ₁₆	¹⁵ / ₁₆	1.5
869754	3 SDR 100 MG	20 ft lb-100 ft lb	1 ft lb	3/8	18 ⁷ / ₁₆	1 ³ / ₈	1 ¹ / ₃₂	¹⁵ / ₁₆	1.5
869757	4 SDR 150 MG	30 ft lb-150 ft lb	1 ft lb	1/2	19 ³ / ₁₆	1 ⁶¹ / ₆₄	1 ²⁷ / ₆₄	¹⁵ / ₁₆	2.0
869758	4 SDR 250 MG	50 ft lb-250 ft lb	2 ft lb	1/2	25 ⁵ / ₃₂	1 ⁶¹ / ₆₄	1 ²⁷ / ₆₄	1	3.5
810760	6 SDR 300	50 ft lb-300 ft lb	2.5 ft lb	3/4	28 ²⁵ / ₆₄	2 ¹¹ / ₁₆	1 ⁶³ / ₆₄	2	7.8
810597*	6 SDR 600	100 ft lbs-600 ft. lbs.	5 ft lb	3/4	38 ³ / ₄	2 ¹¹ / ₁₆	1 ⁶³ / ₆₄	2	10.5
810525**	6 SDR 700	100-700 ft. lbs.	5 ft lb	3/4	39 ¹ / ₈	2 ¹¹ / ₁₆	1 ⁶³ / ₆₄	2	16.5

Part No.	Model	Torque Capacity	Steps of Graduation	Square Drive (in.)	A (cm)	B (cm)	C (cm)	D (cm)	Weight (kg)
869774	2 SDR 6 Nm MG	1 Nm-6 Nm	0.1 Nm	1/4	28.5	2.4	2.0	3.1	0.5
869775	2 SDR 20 Nm MG	4 Nm-20 Nm	0.2 Nm	1/4	28.5	2.4	2.0	3.1	0.5
869776	3 SDR 20 Nm MG	4 Nm-20 Nm	0.2 Nm	3/8	30.4	2.4	2.0	3.1	0.5
869782	3 SDR 50 Nm MG	10 Nm- 50 Nm	0.5 Nm	3/8	39.4	3.5	2.7	3.1	0.7
869777	3 SDR 100 Nm MG	20 Nm-100 Nm	0.5 Nm	3/8	39.1	3.5	2.7	3.1	0.7
869797	4 SDR 100 Nm MG	20 Nm-100 Nm	0.5 Nm	1/2	39.1	3.5	2.7	3.1	0.7
869783	3 SDR 140 Nm MG	30 Nm-140 Nm	1 Nm	3/8	47.0	3.5	2.7	3.1	0.7
869798	4 SDR 140 Nm MG	30 Nm-140 Nm	1 Nm	1/2 (3/8 body)	46.4	3.5	3.5	3.1	0.7
869778	4 SDR 200 Nm MG	40 Nm-200 Nm	1 Nm	1/2	49.5	5.0	3.6	3.1	0.9
869779	4 SDR 300 Nm MG	60 Nm-300 Nm	2 Nm	1/2	63.4	5.0	3.6	3.1	1.6
869789	6 SDR 300 Nm MG	60 Nm-300 Nm	2 Nm	3/4	63.4	5.0	3.6	3.1	1.6
810598*	6 SDR 800 Nm	150 Nm-800 Nm	5 Nm	3/4	97.5	6.8	5.0	3.8	4.8


* Optional extension tube, Part # 853363, can be ordered. Use of the extension requires wrench recalibration.

** The 6 SDR 700 comes from the factory with an extension tube and MUST be used with that tube attached.



Square Drive Micrometer Adjustable

SD Series

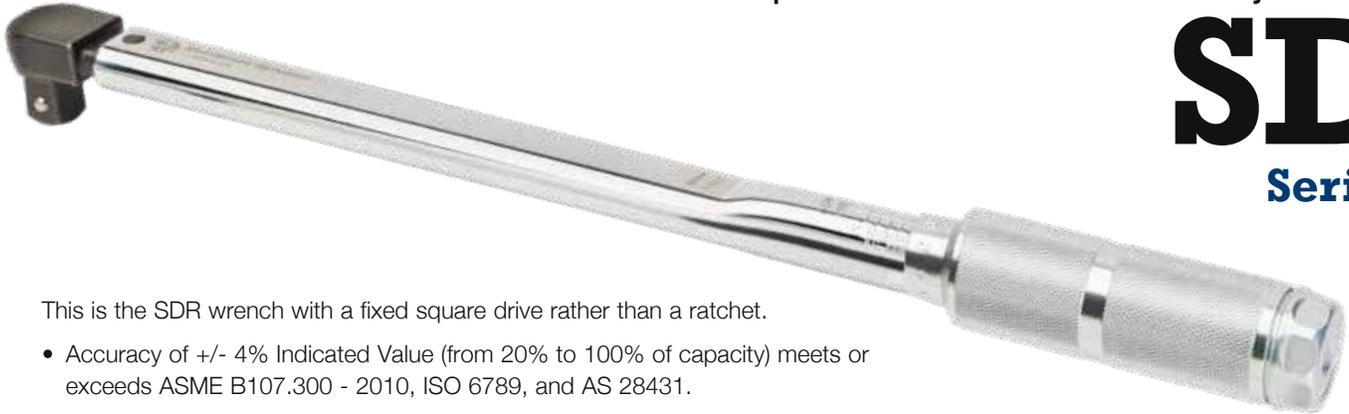


This is the SDR wrench with a fixed square drive rather than a ratchet.

- Accuracy of +/- 4% Indicated Value (from 20% to 100% of capacity) meets or exceeds ASME B107.300 - 2010, ISO 6789, and AS 28431.
- Includes FREE calibration certificate from our ISO/IEC 17025 Accredited Laboratory.

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59

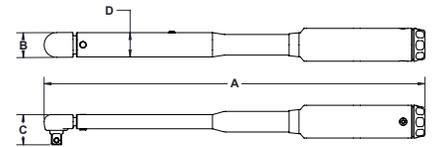

SD Fixed Male Square Drive Head Series - English

Part No.	Model	Torque Capacity	Steps of Graduation	Square Drive	A (in.)	B (in.)	C (in.)	D (in.)	Weight (lbs.)
869160	2 SD 50 I MG	10 in lb-50 In lb	1 in lb	1/4"	10 ¹¹ / ₁₆	⁵⁹ / ₆₄	⁵⁵ / ₆₄	¹⁵ / ₁₆	1.0
869161	2 SD 150 I MG	30 in lb-150 in lb	2 in lb	1/4"	10 ⁴⁹ / ₆₄	⁵⁹ / ₆₄	⁵⁵ / ₆₄	¹⁵ / ₁₆	1.0
869159	3 SD 200 I MG	40 in lb-200 in lb	2 in lb	3/8"	10 ³⁷ / ₆₄	⁵⁹ / ₆₄	1 ¹ / ₃₂	¹⁵ / ₁₆	1.0
869163	3 SD 750 I MG	150 in lb-750 In lb	5 in lb	3/8"	14 ¹ / ₄	¹⁵ / ₁₆	1 ⁹ / ₆₄	¹⁵ / ₁₆	1.1
869167	4 SD 150 MG	30 ft lb-150 ft lb	1 ft lb	1/2"	17 ²⁹ / ₃₂	¹⁵ / ₁₆	1 ¹⁵ / ₆₄	¹⁵ / ₁₆	2.0
810600*	6 SD 600	100 ft lb-600 ft lb	5 ft lb	3/4"	35 ²⁵ / ₆₄	1 ¹ / ₂	1 ²⁹ / ₆₄	2	8.8
Part No.	Model	Torque Capacity	Steps of Graduation	Square Drive	A (cm)	B (cm)	C (cm)	D (cm)	Weight (kg)
810601*	6 SD 800 Nm	150 Nm-800Nm	5 Nm	3/4"	99.3	5.1	3.7	3.8	3.992

* Optional extension tube, Part # 853363, can be ordered. Use of the extension requires wrench recalibration.

Carry and Storage Cases

Strong, durable cases for carrying and storing your SR brand micrometer adjustable torque wrenches. Fits SDR, SD, and CCM series tools.

Part No.	Size	Type	Wrench Range
820122	Small	Molded Plastic	50I-200I, 6 Nm-20 Nm
820123	Medium	Molded Plastic	600I-150 ft. lbs., 50 Nm-200 Nm
820124	Large	Molded Plastic	250 ft. lbs., 300 Nm
820170	Extra Large	Molded Plastic	600-700 ft. lbs., 800 Nm



Each wrench includes molded plastic case.



Square Drive Ratchet Preset

LTCR

Series


If we preset the torque value at the factory, we include a Calibration Certificate.

If we do not preset the torque value, you may request a Calibration Certificate.

- Designed specifically for use on production lines where many fasteners are to be tightened to the same torque.
- For preset handle extension order PN 853601 for wrenches of 3000 in. lbs. or less.
- Light weight new comfort grip provides superior ergonomics, reducing operator fatigue.
- Accuracy of +/- 4% meets or exceeds ASME B107.300 - 2010 and ISO 6789, offering consistent assembly quality.
- Wrench can be calibrated using any unit of torque measure.
- Ball bearing rockover assembly assures smooth operation, enhances repeatability, increases cycle life of wrench, and helps control ownership costs.
- Excellent audible and tactile impulse when preset torque is achieved.
- Slide pin ratchet is extremely strong and durable.
- Torque tester must be used to set torque value.



Combination adjusting and release tool (CART 819117) allows operator to easily adjust the torque on all SR preset wrenches.

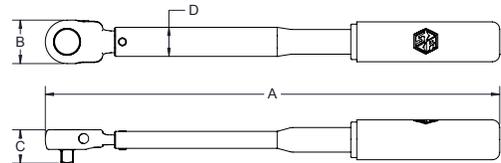

Part No.	Model	Torque Capacity	Square Drive	A (in.)	B (in.)	C (in.)	D (in.)	Weight (lbs.)
810400	LTCR 50 1/4"	10 in lb-50 in lb / 1.2 Nm-6 Nm	1/4"	8	31/32	25/32	15/16	0.5
810401	LTCR 150 1/4"	30 in lb-150 in lb / 3.4 Nm-17 Nm	1/4"	8 1/16	31/32	61/64	15/16	0.5
810589	LTCR 150 3/8"	30 in lb-150 in lb / 3.4 Nm-17 Nm	3/8"	8 37/64	1 11/32	1 1/16	15/16	0.5
810058	LTCR 300 3/8"	60 in lb-300 in lb / 6.8 Nm-34 Nm	3/8"	10 17/32	1 11/32	1 1/16	15/16	1.0
810055	LTCR 750 3/8"	150 in lb-750 in lb / 17 Nm-85 Nm	3/8"	14 23/64	1 11/32	1 1/16	15/16	1.3
810060	LTCR 750 1/2"	150 in lb-750 in lb / 17 Nm-85 Nm	1/2"	14 23/64	1 11/32	1 15/64	15/16	1.3
810402	LTCR 1200 3/8"	240 in lb-1200 in lb / 27.2 Nm-136 Nm	3/8"	17 43/64	1 3/8	1 1/16	15/16	1.5
810056	LTCR 1800 1/2"	360 in lb-1800 in lb / 40.8 Nm-204 Nm	1/2"	18 11/32	1 61/64	1 27/64	15/16	1.8
810059	LTCR 3000 1/2"	600 in lb-3000 in lb / 67.8 Nm-339 Nm	1/2"	22 21/32	1 61/64	1 27/64	1	3.0
810430	LTCR 3000 3/4"	600 in lb-3000 in lb / 67.8 Nm-339 Nm	3/4"	22 21/32	1 61/64	1 19/32	1	3.0
810138	LTCR 3600 3/4"	1200 in lb-3600 in lb / 81.4 Nm-407 Nm	3/4"	27 3/8	2 11/16	1 63/64	2	7.8
810151*	LTCR 7200 3/4"	1400 in lb-7200 in lb / 162.6 Nm-813 Nm	3/4"	37 3/8	2 11/16	1 63/64	2	10.0

* Optional Extension Tube Part No. 853363 can be ordered. Use of the extension requires wrench recalibration.



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59

Square Drive Preset LTCS

Series

- This wrench is identical to the LTRC wrench except it is built with a fixed square drive.
- Adjustments to torque settings can only be made with a Combination Adjusting and Release Tool (CART) to prevent tampering on the production line.


Preset Handle Extension (Part No. 853601) is available to increase reach for limited-access applications for wrenches of 3000 in.lb. capacity and below!



Use of Extension Handle adds 6 inches in total tool length



*If we preset the torque value at the factory, we include a Calibration Certificate.
If we do not preset the torque value, you may request a Calibration Certificate.*

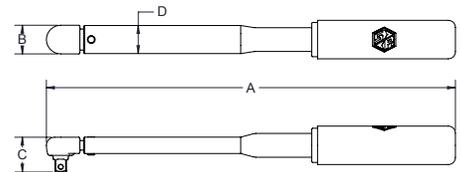

LTCS Fixed Male Square Drive Head Series

Part No.	Model	Torque Capacity	Square Drive	A (in.)	B (in.)	C (in.)	D (in.)	Weight (lbs.)
810168	LTCS 50 I	10 in lb-50 in lb / 1.2 Nm-6 Nm	1/4"	7 1/2	31/32	55/64	15/16	0.5
810170	LTCS 150 I	30 in lb-150 in lb / 3.4 Nm-17 Nm	3/8"	7 1/2	31/32	1 1/32	15/16	0.5
810171	LTCS 300 I	60 in lb-300 in lb / 6.8 Nm-34 Nm	3/8"	9 29/64	31/32	1 1/32	15/16	1.0
810172	LTCS 750 I	150 in lb-750 in lb / 17 Nm-85 Nm	3/8"	13 25/64	31/32	1 9/64	15/16	1.25
810174	LTCS 1800 I	360 in lb-1800 in lb / 40.8 Nm-204 Nm	1/2"	16 61/64	31/32	1 15/64	15/16	1.5
810485	LTCS 3600 I	720 in lb-3600 in lb / 80.14 Nm-407 Nm	3/4"	25 15/32	1 1/2	1 29/64	2	5.5
810153*	LTCS 7200 I	1400 in lb-7200 in lb / 162.6 Nm-813 Nm	3/4"	35 5/64	1 1/2	1 29/64	2	8.25

* Optional Extension Tube Part No. 853363 can be ordered. Use of the extension requires wrench recalibration.

The existing foam grip must be removed prior to Extension Handle installation

The wrench must be calibrated with the Extension Handle in place to account for added tool length

The Extension Handle must be removed to adjust the torque output setting.



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59



Flat Beam

M Series

The four most important requirements of a torque wrench, accuracy, reliability, durability, and low ownership cost, are combined into these exceptional tools. Accuracy is literally ground into the wrench. The special alloy steel beam is ground to a rate of deflection with the use of dead weights, rather than a dimensional tolerance. This process is time consuming and very labor intensive, but the result is a tool that remains accurate as long as the beam is intact and the pointer is on zero under no-load condition. The flat shape of the beam insures the wrench remains at a right angle to the fastener, reducing or eliminating side-loading error. This unique taper-grinding distributes stress evenly along the entire length of the beam, extending tool life indefinitely. With a minimum of moving parts, these tools are virtually repair and maintenance free.

Features

- Incredibly durable design - actual service life frequently measured in decades!
- Very low cost of ownership - exceptional accuracy retention permits extended calibration intervals, and they are virtually maintenance and repair free!
- Ideal for prevailing-torque and destructive testing applications.
- Low mass/low inertia design of pointers helps eliminate reading distortion.
- Memory feature consists of fingers which follow a track in the scale and remain in place to indicate maximum torque achieved.
- Peak torque indicated on scale is accurate, even on destructive testing applications.
- Pivoted handle concentrates load at precise point on lever to assure torque accuracy.
- Meets or exceeds ASME B107.300 - 2010 and ISO 6789.
- Accuracy of all flat beams is +/- 2% of indicated value from 20% to 100% of capacity, in both directions.
- Includes FREE calibration certificate from our ISO/IEC 17025 Accredited Laboratory.

Crowfoot Adapter

- Gain the significant advantage of our interchangeable head system by attaching the SRA to any fixed square drive wrench.
- Ideal for use when a direct reading torque wrench is required but space is limited.
- Use of an adapter requires calculation of torque output.
- When used with our 1 7/16" (36.5mm) Interchangeable Heads the adapter length will be 3" (76.3mm).

Crowfoot Adapter

Part Number	Model	Description
850653	SRA-¾"	¾ Female-Male Dovetail
850655	SRA-½"	½ Female-Male Dovetail



WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59




Flat Beam Memory Series - English

Part No.	Model	Torque Capacity	Steps of Graduations	Square Drive	Lever Arm Distance	Dimensions (in.)				Weight
						A	B	C	D	
● 850233	M 32 IO	0-32 in. ozs.	2 in. ozs.	¼ in.	6.0 in.	6 7/8	1 3/64	¼	2 ¼	0.2 lbs.
● 850254	M 80 IO	0-80 in. ozs.	5 in. ozs.	¼ in.	6.2 in.	6 27/32	1 31/64	¼	2 ¼	0.25 lbs.
● 850202	M 160 IO	0-160 in. ozs.	10 in. ozs.	¼ in.	6.0 in.	6 27/32	1 31/64	¼	2 ¼	0.25 lbs.
● 850188	M 10 I	0-10 in. lbs.	½ in. lb.	¼ in.	6.0 in.	6 27/32	1 ½	¼	2 ¼	0.25 lbs.
● 850222	M 25 I	0-25 in. lbs.	1 in. lb.	3/8 in.	6.3 in.	6 27/32	1 25/32	3/8	2 ¼	0.4 lbs.
● 850242	M 50 I	0-50 in. lbs.	2 in. lbs.	3/8 in.	6.0 in.	6 7/8	1 45/64	3/8	2 ¼	0.4 lbs.
● 850191	M 100 I	0-100 in. lbs.	5 in. lbs.	3/8 in.	6.5 in.	7 7/16	1 45/64	3/8	2 ¼	0.4 lbs.
● 850211	M 200 I	0-200 in. lbs.	10 in. lbs.	3/8 in.	9.0 in.	7 7/16	1 45/64	3/8	2 ¾	0.5 lbs.
■ 850228	M 300 I	0-300 in. lbs.	10 in. lbs.	3/8 in.	13.5 in.	16	3 51/64	3/8	3 51/64	2.75 lbs.
■ 850246	M 600 I	0-600 in. lbs.	25 in. lbs.	3/8 in.	13.5 in.	16	3 51/64	3/8	3 51/64	2.75 lbs.
■ 850247	M 600 I	0-600 in. lbs.	25 in. lbs.	½ in.	13.5 in.	16	3 51/64	½	3 51/64	2.75 lbs.
■ 850195	M 1200 I	0-1200 in. lbs.	50 in. lbs.	½ in.	15.0 in.	17 ½	3 51/64	½	3 51/64	2.75 lbs.
■ 850205	M 1800 I	0-1800 in. lbs.	50 in. lbs.	½ in.	18.0 in.	20 9/16	3 51/64	½	3 51/64	3.75 lbs.
■ 850220	M 25	0-25 ft. lbs.	1 ft. lb.	3/8 in.	13.5 in.	16	3 51/64	3/8	3 51/64	2.75 lbs.
■ 850240	M 50	0-50 ft. lbs.	2 ft. lbs.	3/8 in.	13.5 in.	16	3 51/64	3/8	3 51/64	2.75 lbs.
■ 850241	M 50	0-50 ft. lbs.	2 ft. lbs.	½ in.	13.5 in.	16	3 51/64	½	3 51/64	2.75 lbs.
■ 850190	M 100	0-100 ft. lbs.	5 ft. lbs.	½ in.	15.0 in.	17 ½	3 51/64	½	3 51/64	2.75 lbs.
■ 850198	M 150	0-150 ft. lbs.	5 ft. lbs.	½ in.	18.0 in.	20 9/16	3 51/64	½	3 51/64	3.75 lbs.
■ 850227	M 300	0-300 ft. lbs.	10 ft. lbs.	¾ in.	30.0 in.	34 ¼	5 5/32	¾	3 51/64	10.75 lbs.


Flat Beam Memory Series - Newton Metre

Part No.	Model	Torque Capacity	Steps of Graduations	Square Drive	Lever Arm Distance	Dimensions (cm)				Weight
						A	B	C	D	
● 855276	M 110 cNm	0-110 cNm	5 cNm	¼ in.	152.4 mm	17.37	1.59	0.64	5.72	0.5625 kg
● 855281	M 2.5 Nm	0-2.5 Nm	.1 Nm	3/8 in.	158.8 mm	17.37	3.12	0.95	5.72	0.765 kg
● 855282	M 5 Nm	0-5 Nm	.2 Nm	3/8 in.	152.4 mm	17.37	3.12	0.95	5.72	0.765 kg
● 855283	M 12 Nm	0-12 Nm	.5 Nm	3/8 in.	165.1 mm	18.87	3.12	0.95	5.72	0.855 kg
● 855284	M 22 Nm	0-22 Nm	1 Nm	3/8 in.	228.6 mm	25.15	3.12	0.95	6.99	1.125 kg
■ 855285	M 34 Nm	0-34 Nm	1 Nm	3/8 in.	340.4 mm	40.64	6.17	0.95	9.63	6.1875 kg
■ 855287	M 70 Nm	0-70 Nm	2 Nm	3/8 in.	342.9 mm	40.64	6.17	0.95	9.63	6.1875 kg
■ 855288	M 70 Nm	0-70 Nm	2 Nm	½ in.	342.9 mm	40.64	6.50	1.27	9.63	6.1875 kg
■ 855289	M 140 Nm	0-140 Nm	5 Nm	½ in.	381.0 mm	40.64	6.50	1.27	9.63	6.1875 kg
■ 855290	M 210 Nm	0-210 Nm	10 Nm	½ in.	457.2 mm	52.22	6.50	1.27	9.63	8.4375 kg
■ 855292	M 410 Nm	0-410 Nm	10 Nm	¾ in.	762.0 mm	87.00	10.59	1.91	20.32	24.1875 kg

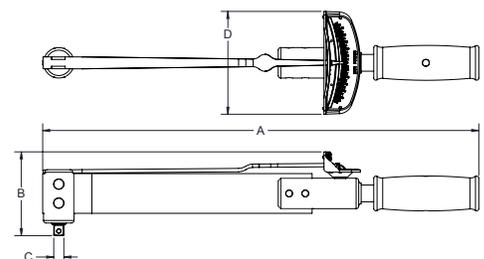



Industrial Dial **IDW** Series

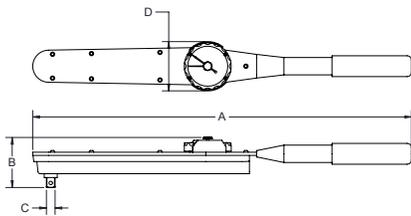

- Oversized single scale dial face is extremely easy to read and helps to eliminate parallax error.
- Heavy duty dial guard protects against breakage.
- Memory indicator is provided on each wrench and remains at the maximum torque achieved for positive verification.
- Each wrench comes in its own custom storage box.
- Wrench can be used in both the left and right hand direction.
- Accuracy of +/- 3% Indicated Value (from 20% to 100% of capacity) meets or exceeds ASME B107.300 - 2010, and ISO 6789.
- A neoprene rubber grip is provided for comfort and to insure proper hand placement for maximum accuracy; not available on 3/4" and 1" sq. dr. models.
- Extension handle included on 600 ft.-lb/800Nm and greater capacity models for ergonomic advantage.
- Includes FREE NIST-traceable tabulated certification!

Industrial Dial Wrench Series — English

Part No.	Model	Torque Capacity	Steps of Graduation	Square Drive	Weight:	Length (in.):	Dial Diameter (in.)
815700	IDW 30 I	6-30 in. lbs.	1 in. lb.	¼ in.	1.2 lbs.	10¼	2½
815719	IDW 50 I	10-50 in. lbs.	2 in. lbs.	¼ in.	1.2 lbs.	10¼	2½
815701	IDW 150 I	30-150 in. lbs.	5 in. lbs.	¾ in.	1.2 lbs.	10¼	2½
815702	IDW 300 I	60-300 in. lbs.	5 in. lbs.	¾ in.	1.2 lbs.	10¼	2½
815703	IDW 600 I	120-600 in. lbs.	10 in. lbs.	¾ in.	1.4 lbs.	12¼	2½
815704	IDW 150	30-150 ft. lbs.	2 ft. lb.	½ in.	2.8 lbs.	20¼	2½
815705	IDW 250	50-250 ft. lbs.	5 ft. lb.	½ in.	2.8 lbs.	20¼	2½
815706*	IDW 600	120-600 ft. lbs.	10 ft. lbs.	¾ in.	7.5 lbs.	46½	2½
815722*	IDW 1000	200-1000 ft. lbs.	10 ft. lbs.	1 in.	7.5 lbs.	46½	2½

Industrial Dial Wrench — Newton Metre

815720	IDW 6 Nm	1.2-6 Nm	.25 Nm	¼ in.	0.5443 Kg	26.162 Cm	7.30 cm
815707	IDW 15 Nm	3-15 Nm	.25 Nm	¾ in.	0.5443 Kg	26.162 Cm	7.30 cm
815708	IDW 35 Nm	7-35 Nm	.5 Nm	¾ in.	0.5443 Kg	26.162 Cm	7.30 cm
815709	IDW 70 Nm	14-70 Nm	1 Nm	¾ in.	0.6350 Kg	31.242 Cm	7.30 cm
815710	IDW 200 Nm	40-200 Nm	2.5 Nm	½ in.	1.27 Kg	52.837 Cm	7.30 cm
815711	IDW 350 Nm	70-350 Nm	5 Nm	½ in.	1.27 Kg	52.837 Cm	7.30 cm
815712*	IDW 800 Nm	160-800 Nm	10 Nm	¾ in.	3.40 Kg	118.11 Cm	7.30 cm
815723*	IDW 1300 Nm	260-1300 Nm	25 Nm	1 in.	7.71 Kg	181.61 Cm	7.30 cm

* Includes Extension Handle

NOTE: Torque output on a dial wrench is NOT impacted by use of the handle. However, the addition of a crowfoot adapter does change the tool output and must be considered in the torque equation to ensure accuracy.

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59

Torque Multipliers

Series

Features

- Capacities to 4000 ft.-lbs. or metric equivalent.
- Multipliers can be used in any unit of measure, depending on the wrench.
- Reaction bar keeps gear box from turning.
- Gear train within multiplier has natural frictional loss. For normal requirements, a loss factor of 10% to 20% may be used.

As noted above, there is frictional loss in output torque due to the gears. As a result of the frictional loss, we recommend our Exacta 2, (1% Indicated Value) or our M-Series Flat Beam wrenches (2% Indicated Value).

The frictional loss has a significant impact on torque accuracy when compared with using only a torque wrench. Using a more accurate torque wrench reduces the torque output variable.



Part No.	Model	Style	Max Torque	Input Drive Size	Output Drive Size	Gear Ratio	Overall Length:	Weight
850369	TM 1000	Low-ratio	1000 ft. lbs.	½"	¾"	4-1	26 in.	12 lbs.
850367	TM 2000	Low-ratio	2000 ft. lbs.	¾"	1"	4-1	26 in.	14 lbs.
850368	TM 4000	Low-ratio	4000 ft. lbs.	1"	1½"	4.33:1	30½ in.	35 lbs.

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59

Micrometer Adjustable Torque Screwdriver

CAL 36/4 Series

- Accuracy of +/- 6% Indicated Value (from 20% to 100% of capacity) meets or exceeds ASME B107.300 - 2010 and ISO 6789.
- Incredibly durable! Many users have experienced a service life of 10+ years!
- Operators cannot overtorque - clutch releases at set torque.
- Anti-backlash design for repeatability.
- To operate, simply dial in torque and insert bit.
- Bi-directional CW/CCW versatility.
- Polished aluminum exterior.
- Scales clearly engraved on shaft and magnified for ease of reading.
- Includes FREE calibration certificate from our ISO/IEC 17025 Accredited laboratory! Can be ordered with certification for English or Metric units of measure. (Use Part No. 810017 for Nm certification on Cal 36/4.)
- Uses standard bits, adapters, and sockets.

Specifications

	CAL 36/4 Part No. 810587
Capacity	2-36 in. lbs./2-4 Nm
Graduation	2 in. lbs./2 Nm
Length (less bit)	7 ¹⁹ / ₆₄ "
Grip Diameter	1 ³ / ₈ "
Weight	0.5 lbs.
Drive Size	1/4" Female Hex

CAL 40 Part No. 810477

Capacity	3-40 kgf•cm.
Graduation	2 kgf•cm
Length (less bit)	7 ³⁹ / ₆₄ "
Grip Diameter	1 ³ / ₈ "
Weight	0.5 lbs.
Drive Size	1/4" Female Hex



**CAL 36/4K
Screwdriver Kit**
29 Piece Kit

Part No. 810568

Contains 1 each of the listed bits and a CAL 36/4 screwdriver

Hex 1/4	Slotted 8-10	Torx T20
Hex 1/2	Slotted 12-14	Torx T25
Hex 3/4	Socket Adapter 1/4	Torx T30
Hex 1	Bit Holder 1/4	Torx T40
Hex 3/4	Phillips #0	Sq. Recess 0
Posidriv #1	Phillips #1	Sq. Recess 1
Posidriv #2	Phillips #2	Sq. Recess 2
Slotted 0-1	Phillips #3	Sq. Recess 3
Slotted 3-4	Torx T10	
Slotted 5-6	Torx T15	

Includes Custom Case

Part No. 810588

Part No.	Description
810587	CAL 36/4 Screwdriver
819953	1/4" Hex to 1/4" Sq. Drive
809449	No. 1 Phillips Power Bit
809467	No. 2 Phillips Power Bit
809434	No. 2 Slotted Power Bit
809448	No. 4 Slotted Power Bit

Includes Custom Case

EMTSK 36/4 Screwdriver Kit

6 Piece Kit



WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59

Micrometer Adjustable Torque Screwdriver

ExacTorq® Series



Exact Torque Adjustment Using Digilock Control Mechanism

Gone are the days of estimating torque. A simple twist of ExacTorq's end-mounted DigiLock mechanism sets your torque levels in exact, single digit increments. The positive locking detent secures your selection.

Enhance Comfort and Accuracy with Advanced Ergonomics

Enhanced comfort translates into enhanced accuracy. The ExacTorq® features a tri-lobular handle design. This gives users enhanced leverage, plus rounded surfaces for comfort and superior grip control. With each turn, this unique design involves only major muscle groups to reduce strain and potential repetitive-motion injury. Additionally, the ExacTorq® is comfortable in even the smallest of hands, performing flawlessly when used by women and men on the assembly line.

Features

- DigiLock Control Mechanism revolutionizes manual torque adjustment.
- Positive locking detent secures selected torque value.
- Can be used in both right and left hand directions.
- Designed to meet or exceed ASME B107.300 - 2010 and ISO 6789 specifications, each ExacTorq ships with a calibration certificate from our ISO/IEC 17025 Accredited Laboratory.
- Operator cannot over torque. Clutch releases automatically when desired torque has been achieved.
- Uses standard bits, sockets and adapters.
- Anti-backlash design enhances repeatability.
- Accuracy of +/- 6% Indicated Value.

Specifications

Part Number
Capacity
Graduation
Length (less bit)
Weight
Drive Size

ExacTorq 100

810045
20-100 in. oz.
1 in. oz.
6 ²⁷/₆₄"
0.4 lbs
¼ in. Female Hex


ExacTorq 74

810046
15-74 cNm
1cNm
6 ³⁵/₆₄"
0.4 lbs
¼ in. Female Hex

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59



Includes FREE certification from our ISO /IEC 17025 Accredited calibration laboratory.



PM-15

Preset Screwdriver

PM Series

If we preset the torque value at the factory, we include a Calibration Certificate.

If we do not preset the torque value, you may request a Calibration Certificate.

- Perfect for assembly of electronic components and precision mechanical products!
- Ideal for use in field maintenance kits - electro-static discharge compliant when ESD practices are used.
- Clutch releases automatically when preset torque attained - no overtorquing.
- Anti-backlash design for repeatability.
- Long shaft allows operator to reach limited-access applications.
- Accuracy of +/- 6% (from 20% to 100% of capacity) meets or exceeds ASME B107.300 - 2010 and ISO 6789 requirements.
- Bi-directional versatility - CW and CCW operation.
- Uses standard bits, adapters, and sockets.
- Torque value can be set using any unit of torque measure.



PM-36

Specifications	PM-5	PM-15	PM-36
	Part No. 810007	Part No. 810064	Part No. 810563
Capacity	100 in. ozs. 6.25 in. lbs. 70 cNm 7.2 kgf•cm	240 in. ozs. 15 in. lbs 1.65 Nm 17.2 kgf•cm	576 in. ozs. 36 in. lbs. 4 Nm 40 kgf•cm
Length (less bit)	5 17/64"	6 21/64"	7 5/32"
Grip Diameter	49/64"	1 1/32"	1 15/64"
Grip Length	3"	3"	
Weight	0.25 lbs.	0.3 lbs.	0.5 lbs.
Drive Size	1/4" Female Hex	1/4" Female Hex	1/4" Female Hex

Color code all your screwdrivers

When you place your order, just mention you want colors and we will send a package of five easy-to-apply heat shrink sleeves. Color code bands are 1/2" in length.



PM-5

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59

Part No.	Package Contents
816734	Multi-color (1 each)
816735	Blue (5)
816736	Yellow (5)
816737	Red (5)
816738	White (5)
816739	Green (5)

PM Series Screwdrivers

Torque tools are used to remove variables in the measuring and tightening process.

A poorly designed tool does not eliminate variables introduced by the operator. It does not achieve the intended goal and becomes a variable in and of itself.

When it comes to screwdrivers, an operator naturally applies thrust force to prevent slipping off, or out of the screw. A properly designed screwdriver eliminates the variable of thrust force.

If the design allows the measuring element to be affected by thrust force, the results in the test lab will be quite different from the actual results on the shop floor.

In our test methodology our results had to be reproducible and quantifiable. First we tested the transducer used in the test to ensure that it was unaffected by thrust loads.

Then we tested our screwdrivers with no thrust force, followed by testing with measurable thrust force through the use of certified weights.

When you find a torque screwdriver with results like this, buy it.

PM-5 set @ 20 in.oz.

Test #	w/o Thrust Load		w/10 lb Thrust Load		w/30 lb Thrust Load	
	Actual	+/- Accuracy	Actual	+/- Accuracy	Actual	+/- Accuracy
1	19.6	-2.000%	19.8	-1.000%	19.4	-3.000%
2	19.3	-3.500%	20.4	2.000%	19.4	-3.000%
3	19.7	-1.500%	20.6	3.000%	19.4	-3.000%
4	19.4	-3.000%	19.8	-1.000%	19.7	-1.500%
5	20.7	3.500%	20	0.000%	20	0.000%
6	20.5	2.500%	19.7	-1.500%	20.2	1.000%
7	20.6	3.000%	20.3	1.500%	20	0.000%
8	20	0.000%	20	0.000%	19.6	-2.000%
9	19.8	-1.000%	19.9	-0.500%	19.8	-1.000%
10	19.3	-3.500%	19.6	2.000%	19.9	-0.500%
11	19.7	-1.500%	19.9	-0.500%	20.6	3.000%
12	19.7	-1.500%	19.8	-1.000%	20.4	2.000%
13	19.7	-1.500%	20.01	0.050%	20.3	1.500%
14	19.5	-2.500%	19.9	-0.500%	19.6	-2.000%
Average	19.821	-0.893%	19.979	-0.104%	19.879	-0.607%
Range	1.4		1		1.2	

PM-15 set @ 3 in.lb.

Test #	w/o Thrust Load		w/10 lb Thrust Load		w/30 lb Thrust Load	
	Actual	+/- Accuracy	Actual	+/- Accuracy	Actual	+/- Accuracy
1	3.08	2.667%	2.96	1.333%	3.02	0.667%
2	2.99	-0.333%	2.99	-0.333%	3.03	1.000%
3	2.93	-2.333%	3.08	2.667%	3.01	0.333%
4	2.9	-3.333%	3.08	2.667%	3.01	0.333%
5	2.92	-2.667%	3.1	3.333%	2.97	-1.000%
6	2.93	-2.333%	3.13	4.333%	3.01	0.333%
7	2.92	-2.667%	3.02	0.667%	3.08	2.667%
8	2.98	-0.667%	2.99	-0.333%	3.08	2.667%
9	2.95	-1.667%	2.98	-0.667%	3.08	2.667%
10	2.99	-0.333%	2.98	-0.667%	3.12	4.000%
11	2.93	-2.333%	2.97	-1.000%	3.03	1.000%
12	2.95	-1.667%	2.99	-0.333%	2.99	-0.333%
13	2.9	-3.333%	3.01	0.333%	2.96	-1.333%
14	2.96	-1.333%	3.09	3.000%	2.96	-1.333%
Average	2.952	-1.595%	3.026	0.881%	3.025	0.833%
Range	0.18		0.17		.16	



**Sturtevant
Richmont**

System 8[®] **Digital Torque Tester**

***Our most accurate digital
torque tester with Fail
Safe Engineering!***



**Click here for video
Most Common
Testing Mistakes**



The ultimate in torque tool calibration.

The SYSTEM 8 Digital Torque Tester is much more than a torque calibration unit that is accurate to +/- .25% of Indicated Value from 10% to 100% of capacity. It is a well-designed system engineered to turn uncertainties into certainties with:

- A wide working range from 2.5 inch oz to 2000 ft. lbs.
- Floating decimal point, 6 digit display is easy to read
- Highly visible display with 6 digit floating decimal point provides superior resolution.
- Fail Safe Engineering over capacity and alert tracking.
- Greater accuracy and durability with simplicity and ease of operation
- Selectable operation modes for testing all but impact tools.

Like all Sturtevant Richmont products, the System 8 meets or exceeds the following standards:

- ASME B107.300 - 2010 Electronic Tester, Hand Torque Tools
- ISO 5393 Rotary tools for threaded fasteners- products test methods.
- ASME B107.4M Driving and Spindle Ends for Portable Hand, Impact, Air, and Electric Tools (Percussion Tools Excluded).
- ISO 1773 Assembly Tools for Bolts and Screws – Driving Squares for Power Socket Wrenches and Hand Socket Wrenches.
- ISO 1774-2 Assembly Tools for Bolts and Screws – Driving Squares for power socket tools

System 8 display has a floating point decimal resolution showing six digits throughout. Combine that with an accuracy of 0.25% (indicated value) from 10% to 100% and System 8 capabilities give you control of your torque testing program.

The new System 8® line of Digital Torque Testers is ideal for interim or daily torque testing programs for clicker torque wrenches, camover torque tools, torque screwdrivers, and non-impact power tools.

- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59


Features and Characteristics

- Tests in both clockwise and counterclockwise directions.
- Four modes of operation - Track, Peak, Initial Peak and Power Tool - provide excellent versatility.
- Units of measure include English, Standard International and Metric.
- 999 records that can be downloaded
- Works with Torque Tool Manager 4 for calibration/ documentation.
- Red/Green LED indicates whether a measurement is within the target torque value.
- Includes FREE certificate of calibration from our ISO/IEC 17025 Accredited Laboratory!
- Includes 120-240 VAC to 6 VDC screw on power supply for security during power tool testing.
- Runs on four AA NiMH rechargeable batteries. Batteries sold separately. Quick charge unit is available.
- Includes a rugged protective case for storage and transit.
- Power Tool mode has ten filters and will accurately test all clutch type and pulse tools.

Ordering Information

Part No.	Model	Description
10600	System 8	System 8 Digital Torque Tester
10601	Transducer Switch Module	Transducer Switch Module
10740	4-Slot Battery Charge Unit	4-Slot AC powered external battery charging unit
10741	4-Slot Battery Charge Unit	4-Slot AC powered external battery charging unit
816261	4 NiMH Batteries	4-pack, AA 2300 mAh rechargeable NiMH batteries
21555	System 8 Power Supply	System 8 Power Supply

Includes FREE certification from our ISO/IEC 17025 Accredited calibration laboratory.



Static Transducers

TT, TT-QC, TT-L Series

Sturtevant Richmont is proud of our flexible transducers for the System 8 and our legacy System 4/5/6—with the legendary Sturtevant Richmont quality built in!

Sturtevant Richmont transducers now come in four designs; two flanged designs for those with existing systems that are expanding their line or using an SR Mechanical Loader, a Quick Connect design for use with our 1000 and 2000 pound capacity Mechanical Loaders, and a new “L” design that incorporates its’ own mounting bracket for rapid horizontal or vertical mounting.

To obtain additional information on these transducers and their use with current and legacy systems, visit. www.srtorque.com



TT-Series Transducers

- Traditional SR hex flange style
- Can be mounted to ML 250 and ML 600 Mechanical Loaders.
- Can be Mounted to Quad Plate for multiple mounting on ML 250.
- Requires detachable cable Part No. 10293. (Except TT 25IO, 1000 and 2000 Series)
- Smaller sizes (up to 400 in. oz. capacity) can be mounted to SSMB, STMB, or UMB brackets.
- Larger sizes (500 ft. lbs. and above) can be mounted on UMB L-bracket.



TT Series			Torque Range			
Part No.	Model	Drive	in.ozs.	in.lbs.	cNm	kgf•Cm
10009*	TT 25IO	.25" Hex Male	2.5–25	0.16–1.6	1.77–17.7	0.18–1.8
10285	TT 10I	.25" Hex Male	16–160	1–10	11.3–113	1.15–11.5
Part No.	Model	Drive	in.lbs.	ft. lbs	Nm	kgf. Cm
10286	TT 50I	.25" Hex Male	5–50	.4–4	.56–5.6	5.6–57
10287	TT 100I	.375" Hex Male	10–100	.83–8.3	1.13–11.3	11.5–115
10288	TT 300I	.375" Hex Male	30–300	2.5–25	3.4–34	34.5–345
10289	TT80	.5" Square Female	96–960	8–80	10.8–108.5	110.6–1106
10290	TT150	.5" Square Female	180–1800	15–150	20.3–203.4	207.4– 2073.8
10291	TT250	.75" Square Female	300–3000	25–250	34–340	345.6–3456.4
Part No.	Model	Drive	ft. lbs.	Nm	Kgf. M	
10292	TT 600	.75" Square Female	60–600	81.3–813.5	8.3–83	
10026*	TT 1000	1" Square Female	100–1000	135.6–1355.8	14–138.2	
10027*	TT 2000	1" Square Female	200–2000	271.2–2712	28–276.5	

*Cable included. All other transducers require additional cable (P/N 10293).

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59

TT-QC Series Transducers

- Quick Connect System
- Can be mounted to ML 1000 and ML 2000 Mechanical Loaders.
- Removal of adapter plate permits use with ML 250 (250 ft. lbs. capacity and below).
- Requires detachable cable Part No. 10293. (Except TT-QC 25IO, 1000 and 2000 Series)
- TT-QC 1000 and 2000 Series can also be used with ML 1000 and ML 2000 and feature permanently attached cables

TT-QC Series			Torque Range			
Part No.	Model	Drive	in.ozs.	in.lbs.	cNm	kgf•Cm
10211*	TT-QC 25IO	.25" Hex Male	2.5–25	0.16–1.6	1.77–17.7	0.18–1.8
10300	TT-QC 10I	.25" Hex Male	16–160	1–10	11.3–113	1.15–11.5
Part No.	Model	Drive	in.lbs.	ft. lbs	Nm	kgf. Cm
10301	TT-QC 50I	.25" Hex Male	5–50	.4–4	.56–5.6	5.6–57
10302	TT-QC 100I	.375" Hex Male	10–100	.83–8.3	1.13–11.3	11.5–115
10303	TT-QC 300I	.375" Hex Male	30–300	2.5–25	3.4–34	34.5–345
10304	TT-QC 80	.5" Square Female	96–960	8–80	10.8–108.5	110.6–1106
10305	TT-QC 150	.5" Square Female	180–1800	15–150	20.3–203.4	207.4– 2073.8
10306	TT-QC 250	.75" Square Female	300–3000	25–250	34–340	345.6–3456.4
Part No.	Model	Drive	ft. lbs.	Nm	Kgf. M	
10307	TT-QC 600	.75" Square Female	60–600	81.3–813.5	8.3–83	
10209*	TT-QC 1000	1" Square Female	100–1000	135.6–1355.8	14–138.2	
10210*	TT-QC 2000	1" Square Female	200–2000	271.2–2712	28–276.5	

*Cable included. All other transducers require additional cable (P/N 10293).

TT-L Series Transducers

- Built-in L-bracket for mounting vertically or horizontally.
- Requires detachable cable Part No. 10293.
- Mounting holes drilled for 5/16" bolts, 3.25" on center.

TT-L Series			Torque Range			
Part No.	Model	Drive	in.ozs.	in.lbs.	cNm	kgf•Cm
10257	TT-L 10I	.25" Hex Male	16–160	1–10	11.3–113	1.15–11.5
Part No.	Model	Drive	in.lbs.	ft. lbs	Nm	kgf. Cm
10258	TT-L 50I	.25" Hex Male	5–50	.4–4	.56–5.6	5.6–57
10259	TT-L 100I	.375" Hex Male	10–100	.83–8.3	1.13–11.3	11.5–115
10260	TT-L 300I	.375" Hex Male	30–300	2.5–25	3.4–34	34.5–345
10261	TT-L 80	.5" Square Female	96–960	8–80	10.8–108.5	110.6–1106
10262	TT-L 150	.5" Square Female	180–1800	15–150	20.3–203.4	207.4– 2073.8
10263	TT-L 250	.75" Square Female	300–3000	25–250	34–340	345.6–3456.4
Part No.	Model	Drive	ft. lbs.	Nm	Kgf. M	
10264	TT-L 600	.75" Square Female	60–600	81.3–813.5	8.3–83	

*Cable included. All other transducers require additional cable (P/N 10293).



WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59



Torq-Tronics 2[®]

Digital Torque Tester Series



The new Torq-Tronics 2 with Fail Safe Engineering takes your quality to a new level.

Accuracy of 0.5% (indicated value) from 10% to 100% of capacity and Torq-Tronics 2 capabilities provide greater control of your torque testing program.

The new Torq-Tronics 2[®] line of Digital Torque Testers is ideal for interim or daily torque testing programs for clicker torque wrenches, camover torque tools, torque screwdrivers, and non-impact power tools.

- Greater accuracy and durability with simplicity and ease of operation
- Highly visible display in any lighting
- 6 digit floating decimal point for superior resolution

Like all Sturtevant Richmont products, Torq-Tronics 2 meets or exceeds the following International and American standards:


- ASME B107.300 - 2010 Electronic Tester, Hand Torque Tools
- ISO 5393 Rotary tools for threaded fasteners- Performance test methods.
- ASME B107.4M Driving and Spindle Ends for Portable Hand, Impact, Air, and Electric Tools (Percussion Tools Excluded).
- ISO 1773 Assembly Tools for Bolts and Screws – Driving Squares for Power Socket Wrenches and Hand Socket Wrenches.
- ISO 1774-2 Assembly Tools for Bolts and Screws – Driving Squares for power socket tools

Click here for video

**Durability In
Our DNA**



Includes FREE calibration certificate from our ISO/IEC 17025 Accredited Laboratory.



Features and Characteristics

- Accuracy of +/- .5% of Indicated Value from 10% to 100% of rated capacity. Meets or exceeds requirements of ASME B107.300-2010.
- Tests in both clockwise and counterclockwise directions.
- Four modes of operation - Track, Peak, Initial Peak and Power Tool.
- Units of measure include English, Standard International and metric.
- Units of 300 inch-pound (34 Nm) capacity and below are optimized for bench mounting; larger units may be mounted vertically or horizontally for better safety and efficiency.
- With only 8 buttons Torq-Tronics 2® is amazingly simple to operate!
- Memory stores up to 999 records that can be downloaded to Hyper-Terminal or terminal type program or serial logger program included on the USB stick to create testing reports and data storage.
- Four line vacuum florescent display (VFD) is easy to read.
- Red/Green LED indicates whether a measurement is within the target torque value.
- Built with Fail Safe Engineering.
- Includes 120-240 VAC to 6 VDC screw on power supply for security during power tool testing.
- Runs on four AA NiMH rechargeable batteries. Batteries sold separately. Quick charge unit is available.
- Includes a rugged protective case for storage and transit.
- Power Tool mode has ten filters and will accurately test all clutch type and pulse tools.

Part No.	Model Designation	Description	Drive Size
10691	Torq-Tronics 2 10l	Digital Torque Tester 1 Nm / 10 in.lb	¼”M Hex
10692	Torq-Tronics 2 50l	Digital Torque Tester 6 Nm / 50 in.lb	¼”M Hex
10693	Torq-Tronics 2 100l	Digital Torque Tester 12 Nm / 100 in.lb	3/8”M Hex
10694	Torq-Tronics 2 300l	Digital Torque Tester 34 Nm / 300 in.lb	3/8”M Hex
10695*	Torq-Tronics 2 80	Digital Torque Tester 109Nm / 80 ft.lb	½”F Sq.
10696*	Torq-Tronics 2 150	Digital Torque Tester 201 Nm / 150 ft.lb	½”F Sq.
10697**	Torq-Tronics 2 250	Digital Torque Tester 339 Nm / 250 ft.lb	¾”F Sq.
10698**	Torq-Tronics 2 600	Digital Torque Tester 814 Nm / 600 ft.lb	¾”F Sq.

*Comes with .375” or 3/8 inch adapter at no additional charge. - Part number 870777

** Comes with .5” or 1/2 inch adapter at no additional charge. - Part number 870778

Part No.	Model Designation	Description
870776	Adapter, .25” F	Adapter, .25” Female Square to .375” Male Square
870777	Adapter, .375 F	Adapter, .375” Female Square to .5” Male Square
870778	Adapter, .5” F	Adapter, .5” Female Square to .75” Male Square
10740	4-Slot Battery Charging Unit	4-slot AC powered external battery charging unit
10741	4-Slot Battery Charging Uni8	8-slot AC powered external battery charging unit
816261	4 AA NiMH Batteries	4-pack, AA 2300 mAh rechargeable NiMH batteries
10599	TTM 4.0	Torque Tool Manager Software
10230	Bracket, Single	Single Stand, holds one Torq-Tronics upright
10231	Bracket, Dual	Dual Stand, holds two Torq-Tronics units upright
21555	Torq-Tronics 2 Power Supply	Torq-Tronics 2 Power Supply

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59

Rundown Fixtures

RDF Series



Rundown fixtures assist in testing the output of pulse, stall and clutch power tools. Neither our testers nor our rundown fixtures are designed or suited for impact tools.

Testing pulse and clutch powers tools are accomplished by allowing the tool to achieve rotational speed prior to torque

measurement. The rundown fixtures all include components to emulate either a hard or medium joint, thus assuring greater test accuracy.

The rundown fixtures work with Torq-Tronics 2 (+/- .5% Indicated Value) and our new System 8 (+/- .25% Indicated Value) Digital Torque Testers.

Filters and Testing

Both Torq-Tronics 2 and the System 8 digital torque testers have power tool testing filters built. Matching tool capacity, rundown fixture capacity, and the transducer capacity is the basis for creating accurate test results.

Part No.	Model Designation	Description	Drive Size
10349	RDF 1 Nm	Rundown Fixture, 1 Nm/10 in lb capacity	1/4" Female Hex
10350	RDF 3 Nm	Rundown Fixture, 3 Nm/25 in lb capacity	1/4" Female Hex
10351	RDF 6 Nm	Rundown Fixture, 6 Nm/50 in lb capacity	1/4" Female Hex
10352	RDF 17 Nm	Rundown Fixture, 17 Nm/150 in lb capacity	3/8" Female Hex
10353	RDF 34 Nm	Rundown Fixture, 34 Nm/300 in lb capacity	3/8" Female Hex
10354	RDF 34 Nm	Rundown Fixture, 34 Nm/300 in lb capacity	1/2" Male Square
10355	RDF 68 Nm	Rundown Fixture, 68 Nm/600 in lb capacity	1/2" Male Square
10356	RDF 109 Nm	Rundown Fixture, 109 Nm/960 in lb capacity	1/2" Male Square
10357	RDF 204 Nm	Rundown Fixture, 204 Nm/1800 in. lb. capacity	1/2" Male Square
10358	RDF 339 Nm	Rundown Fixture, 339 Nm/3000 in. lb. capacity	3/4" Male Square

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59

Torque Tool Manager Software

TTM 4.0

Calibration & Certification Software

Torque Tool Manager 4.0 (TTM 4.0) is calibration and certification software specifically engineered to work with our System 8, Torq-Tronics 2 or your legacy System 4/5, System 6, or Torq-Tronics Digital Torque Testers!


TTM 4.0 software will fulfill your TS 16949 and ISO calibration requirements far more cost-effectively than manual record keeping systems!

- Choose from standard calibration routines or customize your own to assure proper test procedures and accuracy - every time! TTM is flexible; it accommodates the full range of manual and power torque tools.

- TTM 4.0 error-proofs calibration procedures and virtually eliminates retesting due to operator error! TTM 4.0 downloads the proper test protocol to your SR tester and sets the tester up for the tool. It will only accept results that are in line with the test protocol, so errors resulting from failure to follow the programmed procedure are automatically rejected.
- TTM 4.0 keeps records for each tool, including calibration date, serial number, tester and transducer serial numbers, operator, "As Found" and "As Left" test results, NIST traceability numbers, and all other data required for ISO and QS compliance!

Order the TTM 4.0 using part number 10599.

Contact customer service via email at customerservice@sr torque.com

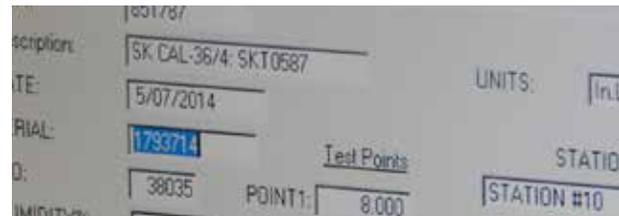

Click here for video

**TTM 4.0
Overview**



Mechanical Loaders **ML Series**

A mechanical loader is the perfect accessory to increase the repeatability and productivity of the System 8 or legacy System 4/5/6! The drive system for each loader assures 90 degree load application, reducing operator-induced test error. The loaders' mechanical advantage reduces the operator effort required to attain and sustain torque during the calibration process. The QC Series transducers include adapter plates for use with the ML 1000 and ML 2000 loaders, and make changeover a matter of seconds. SR mechanical loaders meet or exceed requirements for ASME B107.29M Type 1 loaders.

The Quad Plate permits mounting up to four transducers to the ML 250 or ML 600 to facilitate changeover. When coupled with the Transducer Switch Module both mechanical and electrical changeover can be accomplished in seconds!



Mechanical Loaders & Tester

Part No.	Model Designation	Description
10168	ML 2000	Mechanical Loader, 2000 ft.lb./2710 Nm capacity
10167	ML 1000	Mechanical Loader, 1000 ft.lb./1355 Nm capacity
10431	ML 600	Mechanical Loader, 600 ft.lb./813 Nm capacity
10160	ML 250	Mechanical Loader, 250 ft.lb./338 Nm capacity
10208	Lg. Cart	Roller Cart for ML 1000, 64"W x 30"D x 30"H
10161	Std. Cart	Roller Cart for ML 250, 46"W x 24"D x 46"H
10308	Quad Plate	Rotating plate attaches four -P Transducers to ML 250.
10601	Switch Box	Electrically connects four transducers to System 8



Click here for video


**Mech. Loader/
System 8 Setup**

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59

We supply the weights, arms, wheels, and levers for the top calibration professionals. To known uncertainty budget, we can provide you weights corrected for your specific gravity. For more information see our website, the Newton Metre channel on YouTube, or worldwide please call: +1-847-455-8677 to schedule your free consultation.

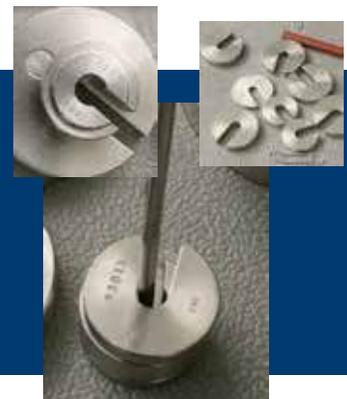

Digital Torque Tester

VeriTorq® Series



- Operation Modes: Track, Peak, and Initial Peak accommodates testing clicker, cam-over, and torque screwdriver testing.
- Clockwise and counter-clockwise test capability supports daily verification, immediate results, and eliminates un-needed calibrations.
- +/- 1% Indicated Value Accuracy from 10% to 100% of capacity.
- Units of measure include English, Standard International, and metric.
- Integral "L" bracket for horizontal or vertical mounting.
- Electronics Module rotates in two planes.
- Large LCD and rotating Electronics Module make it easy to read regardless of wrench length or technician height.
- Serial port for immediate or batch data transfer with terminal program
- Easy programming via our button control panel
- Meets or exceeds ASME B 107.29M.
- Includes FREE calibration certificate from our ISO/IEC 17025 Accredited Laboratory.
- Made in USA by ISO 9001 manufacturer!
- Rugged protective case and power supply included.
- Savings in calibration fees can pay for tester in less than a year.



All VeriTorq® Digital Torque Testers Include:

- 120 VAC or 240 VAC to 6 VDC Converter
- Custom Plastic Carrying/ Shipping Case
- Serial Cable
- Quick Start Instructions
- 1-Year Warranty on Electronics
- Includes FREE certification from our ISO/IEC 17025 Accredited calibration laboratory.

Part No.	Model	Description
10363	VeriTorq® 6 Nm/50 in.lbs.- 120 VAC	.25" Male Hex
10364	VeriTorq® 12 Nm/100 in.lbs.- 120 VAC	.375" Male Hex
10365	VeriTorq® 34 Nm/300 in.lbs.- 120 VAC	.375" Male Hex
10366	VeriTorq® 109 Nm/80 ft.lbs.- 120 VAC	.5" Female Square*
10367	VeriTorq® 201 Nm/150 ft.lbs.- 120 VAC	.5" Female Square*
10368	VeriTorq® 339 Nm/250 ft.lbs.- 120 VAC	.5" Female Square*
10369	VeriTorq® 814 Nm/600 ft.lbs.- 120 VAC	.75" Female Square**
10372	VeriTorq® 6 Nm/50 in.lbs.- 240 VAC	.25" Male Hex
10373	VeriTorq® 12 Nm/100 in.lbs.- 240 VAC	.375" Male Hex
10374	VeriTorq® 34 Nm/300 in.lbs.- 240 VAC	.375" Male Hex
10375	VeriTorq® 109 Nm/80 ft.lbs.- 240 VAC	.5" Female Square*
10376	VeriTorq® 201 Nm/150 ft.lbs.- 240 VAC	.5" Female Square*
10377	VeriTorq® 339 Nm/250 ft.lbs.- 240 VAC	.5" Female Square*
10378	VeriTorq® 814 Nm/600 ft.lbs.- 240 VAC	.75" Female Square**
10180	VeriTorq® Power Supply	VeriTorq® Power Supply

* Includes .5" M Square to .375" F Square Adapter.

** Includes .75" M Square to .5" F Square and .5" M Square to .375" F Square adapters.

WARNING



- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on page 59

SR Product Warranties

Warranty

Sturtevant Richmond Division of Ryeson Corporation warrants all products in this catalog against defective material and workmanship for the periods given in the table. Upon inspection, Sturtevant Richmond shall have the option to repair or replace the defective product and such repair or replacement, free of charge, shall be the Customer's sole and exclusive remedy. Sturtevant Richmond Division of Ryeson Corporation furnishes this limited warranty in lieu of all other warranties, express or implied, including warranties of merchantability and fitness for a particular purpose. Any and all warranties shall be void as to products damaged or rendered unserviceable while in the custody of the customer or third parties. This includes but is not limited to negligence, misuse, modification, repair or alteration of the product.

General Information

Certification

All SR torque testers, torque wrenches (except dial wrenches and preset tools) and torque screwdrivers are certified in our ISO/IEC 17025:2005 A2LA accredited laboratories. Below is a flow chart depicting SR traceability to the National Institute of Standards and Testing (N.I.S.T.) which has reciprocity with all major standards bodies.

Specifications and Dimensions

All specifications and dimensions contained in this catalog are subject to change without notice. Please contact the factory for the latest information.

Please note: Use only NiMH 1.25 volt rechargeable batteries in your test instruments. Using 1.5 volt alkaline disposable batteries will damage your test instrument or create inaccurate readings, damage your torque testing/calibration instrument and VOID your warranty.

Product Family Warranty Duration (from date of purchase)

Torque Transducers	1 year
Torque Testers	1 year
Mechanical Loading Systems	5 years
Calibration Arms	5 years
Load Platforms, Weights	5 years
Calibration	90 days
Software	90 days
All other products	1 year

Liability

Sturtevant Richmond Division of Ryeson Corporation shall not be liable for any damages, incidental, consequential, or otherwise, or commercial loss from any causes, nor for personal injury or property damage. Sturtevant Richmond Division of Ryeson Corporation's liability is limited to the repair or replacement of defective material or workmanship of the product.

Safety

Torque Testers



- Calibration weights can cause tester and its base to tip

Wear safety goggles (users and bystanders).

Counterbalance or anchor mounting base.

Tipping base can cause injury.

Factory Repair & Calibration

Torque wrenches, torque screwdrivers, torque testers – all are precision measurement instruments. You rely on each to assure the quality of your products, which means that tool and tester uptime and calibration are critical to your business.

We offer our customers factory-quality repair using original SR parts, and calibration in our ISO/IEC 17025 Accredited Laboratory. There is no better level of repair available anywhere, and you can rely on our calibration process to assure you are working with accurate tools and testers.

Contact us by phone, fax, or e-mail to discuss your repair and calibration needs for all SR products.

World wide: +1 847-455-8677
In US only, toll-free: 800-877-1347
Fax: 847-455-0347
email: customerservice@srtorque.com

Torque Wrenches



- Overtorquing can cause breakage
- Wrench can break while breaking fasteners loose
- Force against flex stops on flex head torque wrenches can cause head breakage
- An out-of-calibration torque wrench can cause part or tool breakage

Wear safety goggles (user and bystanders).

Do not exceed rated torque.

Do not use a torque wrench to break fasteners loose.

Do not force head of flex head torque wrenches against stops

Periodic recalibration is necessary to maintain accuracy.

Broken tools can cause injury.

Organizations: SR is a member of ISA the Industrial Supply Association and HTI the Hand Tool Institute.





ISO 9002 Registered August 19, 1994
ISO 9001 Registered May 8, 2001
ISO 17025 Accredited October 23, 2003

★ Headquarters

● Sales Offices

● Sales Representatives

● International Distributors

Sturtevant Richmond U.S.
Distributors cover all 50 states



555 Kimberly Drive, Carol Stream, IL 60188 USA

Worldwide +1 (847) 455-8677
U.S. Toll-free: +1 (800) 877-1347
Fax: +1 (847) 455-0347
Email: customerservice@srtorque.com

www.srtorque.com

© 2017 Sturtevant Richmond. All rights reserved.



Accurate. Reliable. Durable. TOOLS YOU TRUST.

Sturtevant Richmond is a leader in the torque tool industry starting with the very first torque wrench invented in 1924. Today, we manufacture manual, digital and wireless torque wrenches, screwdrivers, robust calibration and test equipment, and wireless torque monitors and controls for organizations that need to apply accurate, precise torque to their manufacturing, maintenance and repair operations.

Our products have always been manufactured in the USA, by union workers.



LIT-360 120320